

FORM PTO-1390 (Modified)
(REV 11-98)

U.S. DEPARTMENT OF COMMERCE PATENT AND TRADEMARK OFFICE

ATTORNEY'S DOCKET NUMBER

TRANSMITTAL LETTER TO THE UNITED STATES
DESIGNATED/ELECTED OFFICE (DO/EO/US)
CONCERNING A FILING UNDER 35 U.S.C. 371

MGER.79172/03

U.S. APPLICATION NO. (IF KNOWN, SEE 37 CFR

09/936682

INTERNATIONAL APPLICATION NO
PCT/US 00 29835INTERNATIONAL FILING DATE
30 October 2000PRIORITY DATE CLAIMED
30 October 2000

TITLE OF INVENTION

"System and Method for Analyzing and Imaging Three-Dimensional Volume Data Set"

APPLICANT(S) FOR DO/EO/US

CHEUNG, Yin L.; LEES, Jack; SEMBROSKI, Charles; ZEITLIN, Michael J.; and ACOSTA, Mark

Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:

1. ☒ This is a **FIRST** submission of items concerning a filing under 35 U.S.C. 371.
2. ☐ This is a **SECOND** or **SUBSEQUENT** submission of items concerning a filing under 35 U.S.C. 371.
3. ☒ This is an express request to begin national examination procedures (35 U.S.C. 371(f)) at any time rather than delay examination until the expiration of the applicable time limit set in 35 U.S.C. 371(b) and PCT Articles 22 and 39(1).
4. ☐ A proper Demand for International Preliminary Examination was made by the 19th month from the earliest claimed priority date.
5. ☒ A copy of the International Application as filed (35 U.S.C. 371 (c) (2))
 - a. ☐ is transmitted herewith (required only if not transmitted by the International Bureau).
 - b. ☐ has been transmitted by the International Bureau.
 - c. ☒ is not required, as the application was filed in the United States Receiving Office (RO/US).
6. ☐ A translation of the International Application into English (35 U.S.C. 371(c)(2)).
7. ☐ A copy of the International Search Report (PCT/ISA/210).
8. ☐ Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371 (c)(3))
 - a. ☐ are transmitted herewith (required only if not transmitted by the International Bureau).
 - b. ☐ have been transmitted by the International Bureau.
 - c. ☐ have not been made; however, the time limit for making such amendments has NOT expired.
 - d. ☐ have not been made and will not be made.
9. ☐ A translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3)).
10. ☒ An oath or declaration of the inventor(s) (35 U.S.C. 371 (c)(4)).
11. ☐ A copy of the International Preliminary Examination Report (PCT/IPEA/409).
12. ☐ A translation of the annexes to the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371 (c)(5)).

Items 13 to 20 below concern document(s) or information included:

13. ☒ An Information Disclosure Statement under 37 CFR 1.97 and 1.98.
14. ☐ An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included.
15. ☐ A **FIRST** preliminary amendment.
16. ☐ A **SECOND** or **SUBSEQUENT** preliminary amendment
17. ☐ A substitute specification.
18. ☐ A change of power of attorney and/or address letter.
19. ☒ Certificate of Mailing by Express Mail
20. ☒ Other items or information:

Petition to Make Special under the Energy Program and Statement in Support
Confirmation Postcard

PCT/US 00 29835

MGER.79172/03

21. The following fees are submitted:

BASIC NATIONAL FEE (37 CFR 1.492 (a) (1) - (5)) :

- | | | |
|-------------------------------------|---|-------------------|
| <input checked="" type="checkbox"/> | Neither international preliminary examination fee (37 CFR 1.482) nor international search fee (37 CFR 1.445(a)(2)) paid to USPTO and International Search Report not prepared by the EPO or JPO | \$1,000.00 |
| <input type="checkbox"/> | International preliminary examination fee (37 CFR 1.482) not paid to USPTO but International Search Report prepared by the EPO or IPO | \$860.00 |
| <input type="checkbox"/> | International preliminary examination fee (37 CFR 1.482) not paid to USPTO but international search fee (37 CFR 1.445(a)(2)) paid to USPTO | \$710.00 |
| <input type="checkbox"/> | International preliminary examination fee paid to USPTO (37 CFR 1.482) but all claims did not satisfy provisions of PCT Article 33(1)-(4) | \$690.00 |
| <input type="checkbox"/> | International preliminary examination fee paid to USPTO (37 CFR 1.482) and all claims satisfied provisions of PCT Article 33(1)-(4) | \$100.00 |

ENTER APPROPRIATE BASIC FEE AMOUNT =

\$7,000.00

Surcharge of **\$130.00** for furnishing the oath or declaration later than ☐ 20 ☐ 30 months from the earliest claimed priority date (37 CFR 1.492 (e)).

\$0.00

CLAIMS	NUMBER FILED	NUMBER EXTRA	RATE
Total claims	41 - 20 =	21	x \$18 00
Independent claims	4 - 3 =	1	x \$80 00

\$378.00

\$80.00

\$0.00

Multiple Dependent Claims (check if applicable)

TOTAL OF ABOVE CALCULATIONS =

\$1,458.00

Reduction of 1/2 for filing by small entity, if applicable. Verified Small Entity Statement must also be filed (Note 37 CFR 1.9, 1.27, 1.28) (check if applicable)

\$0.00

SUBTOTAL =

\$1,458.00

Processing fee of **\$130.00** for furnishing the English translation later than ☐ 20 ☐ 30 months from the earliest claimed priority date (37 CFR 1.492 (f)).

\$0.00

TOTAL NATIONAL FEE

\$1,458.00

Fee for recording the enclosed assignment (37 CFR 1.21(h)). The assignment must be accompanied by an appropriate cover sheet (37 CFR 3.28, 3.31) (check if applicable).

\$40.00

TOTAL FEES ENCLOSED

\$1,498.00

Amount to be:
refunded

§

charged

\$

- ☐ A check in the amount of _____ to cover the above fees is enclosed
- ☒ Please charge my Deposit Account No. **19-2112** in the amount of **\$1,498.00** to cover the above fees
A duplicate copy of this sheet is enclosed
- ☒ The Commissioner is hereby authorized to charge any fees which may be required, or credit any overpayment
to Deposit Account No. **19-2112** A duplicate copy of this sheet is enclosed.

NOTE: Where an appropriate time limit under 37 CFR 1.494 or 1.495 has not been met, a petition to revive (37 CFR 1.137(a) or (b)) must be filed and granted to restore the application to pending status.

SEND ALL CORRESPONDENCE TO

William P. Jensen, Esq.
Registration No. 36,833
Shook, Hardy & Bacon L.L.P.
600 Travis, Suite 1600
Houston, Texas 77002-2911
Tel: (713) 227-8008
Fax: (713) 227-9508

W. P. Jensen

William P. Jensen

NAME _____

36.833

REGISTRATION NUMBER

September 17, 2001

DATE _____

SYSTEM AND METHOD FOR ANALYZING AND IMAGING
THREE-DIMENSIONAL VOLUME DATA SETS

BACKGROUND OF THE INVENTION

5

FIELD OF THE INVENTION

The present invention relates generally to imaging of three-dimensional ("3D") volume data sets. More particularly, the present invention relates to fast visualization and analysis of structures within 3D volume data sets.

10

RELATED ART

Many fields of endeavor require the analysis and imaging of three-dimensional ("3D") volume data sets. For example, in the medical field, a CAT (computerized axial tomography) scanner or a magnetic resonance imaging (MRI) device is used to produce a "picture" or diagnostic image of some part of a patient's body. The scanner or MRI device generates a 3D volume data set that needs to be imaged or displayed so that medical personnel can analyze the image and form a diagnosis.

15

Three-dimensional volume data sets are also used in various fields of endeavor relating to the earth sciences. Seismic sounding is one method for exploring the subsurface geology of the earth. An underground explosion or earthquake excites seismic waves, similar to low frequency sound waves, that travel below the surface of earth and are detected by seismographs. The seismographs record the time of arrival of the seismic waves, both direct and reflected waves. Knowing the time and place of the explosion or earthquake, the time of travel of the waves through the interior can be calculated and used to measure the velocity of the waves in the interior. A similar technique can be used for offshore oil and gas exploration. In offshore exploration, a ship tows a sound source and underwater hydrophones. Low frequency (e.g., 50 Hz) sound waves are generated by, for example, a pneumatic device that works like a balloon burst. The sounds bounce off rock layers below the sea floor and are picked up by the hydrophones. In this manner, subsurface sedimentary structures that trap oil, such as faults, folds, and domes, are "mapped" by the reflected waves. The data is processed to produce 3D volume data sets

20

25

30

that include a reflection or seismic amplitude data value at specified (x, y, z) locations within a geographic space.

A 3D volume data set is made up of "voxels" or volume elements. Each voxel has a numeric value for some measured or calculated property, e.g., seismic amplitude of the volume at that location. One conventional approach to generating an image of a 3D volume data set is to cross-section the 3D volume data set into a plurality of two-dimensional ("2D") cross-sections or slices. The image of the 3D volume data set is then built as a composite of the 2D slices. For example, the image of the 3D volume data set is generated by stacking the 2D slices in order, back-to-front, and then composited into a complete image. The user sees the image being built layer by layer as the composite grows. Although the user can see the internal organization or structure of the volume as the composite image grows, the traditional slice and composite technique is typically slow, particularly when very large 3D volume data sets are being used. Additionally, the slice and composite technique clutters the user's field of view with extraneous information, and interferes with the user's ability to accurately visualize and interpret features inherent in the 3D volume data set.

Computer software has been developed specifically for imaging 3D seismic data sets for the oil and gas industry. Examples of such conventional computer programs include VoxelGeo, available from Paradigm Geophysical, Houston, TX, SeisWorks and EarthCube, available from Landmark Graphics Corporation, and IESX, available from GeoQuest. Such conventional computer programs have numerous deficiencies that preclude a user from quickly and accurately visualizing and interpreting features inherent in a 3D seismic data set. Conventional computer programs for visualizing and interpreting 3D seismic data operate on the full 3D volume of seismic data. Consequently, every time a change is made, such as a change to the transparency or opacity settings, the full 3D volume of seismic data must be processed, and the image re-drawn. Even when such programs are run on highly efficient graphics supercomputers, the delay or lag in re-drawing the image is perceptible to the user. For a 3D volume containing 500 megabytes of seismic data, it can take on the order of 30-45 seconds for conventional programs to re-draw the complete image (frame rate of 0.03 to 0.02 frames per second, respectively). During the 30-45 second delay time, the mind of

the user loses focus on the feature of interest, making it difficult to completely and properly analyze the seismic data.

Some conventional 3D seismic interpretation programs provide the capability to visualize and interpret a piece of the full 3D volume of seismic data. The user identifies
5 the coordinates of the selected piece via a menu command. An image of the selected piece is drawn. The selected piece can then be rotated, if desired, at that location. However, to look at a different piece of the full 3D volume of seismic data, such as to follow a geologic feature that has been tentatively identified, the image must be interrupted, a new location or coordinates for the different piece is entered, and a new
10 image is drawn containing the different piece. The interruption in the displayed image makes it difficult for the user to visualize any continuity between the two pieces of the full 3D volume of seismic data that have been imaged. This impedes the user's ability to interpret and identify the geologic features that are inherent in the full 3D volume of seismic data. Additionally, even though only a piece of the full 3D volume of seismic
15 data is being visibly displayed, conventional 3D seismic interpretation programs continue processing the full 3D volume of seismic data to draw the image, thereby slowing the display of the image to the user.

Conventional 3D seismic interpretation programs provide the capability to "auto pick" and identify points that satisfy a voxel selection algorithm. However, these
20 programs typically iterate through the full 3D volume of seismic data to identify the points that satisfy the voxel selection algorithm. This is time consuming even on a high speed graphics supercomputer. Additionally, conventional 3D seismic interpretation programs do not provide the capability to directly delete from the collection of picked voxels. The only way to "eliminate" points from the collection of picked voxels using
25 conventional 3D seismic interpretation programs is to repeatedly adjust the selection criteria for the voxel selection algorithm until the points to be eliminated fall outside of the selection criteria for the displayed points that satisfy the voxel selection algorithm. Each time the selection criteria is adjusted, the image must be interrupted. This iterative process is time consuming, and interferes with the visualization process of the user.

30 Thus, there is a need in the art for a system and method for imaging 3D volume data sets that overcomes the deficiencies detailed above. Particularly, there is a need for

a system and method that re-draws images of large 3D volume data sets in response to user input at a rate sufficiently fast that the user perceives an instantaneous or real-time change in the image, without perceptible delay or lag. There is a need for a system and method that allows a user to interactively change the displayed image in a continuous manner, without interruption or perceptible delay or lag. Such a system and method would allow a user to more quickly and accurately interpret and identify features inherent in 3D volume data sets.

SUMMARY OF THE INVENTION

The present invention is directed to a system and method for analyzing and imaging 3D volume data sets using a 3D sampling probe and other interactive tools. In one aspect of the invention, a method and computer program is provided which may be stored on a storage means for imaging a three-dimensional volume data set comprising a plurality of voxels where each voxel comprises a three-dimensional location and a dataword. The dataword may be representative of a physical phenomena, e.g., an amplitude signal related to a particular position within a geobody. The method may comprise steps such as creating at least one three-dimensional sampling probe, wherein the three-dimensional sampling probe is the same size or a subset of the three-dimensional volume data set. The three-dimensional sampling probe has a probe face plane and an opposing probe face plane. Other steps may include producing a plurality of control points in the probe face plane such that the plurality of control points define one or more lines on the probe face plane, and extending a ribbon section from the one or more lines on the probe face plane toward the opposing probe face plane. An edge of the ribbon section is preferably formed by the one or more lines. Another step of the method may include selectively imaging datawords representative of the physical phenomena at three-dimensional locations which intersect the ribbon section and the three-dimensional sampling probe.

The method may further comprise steps of editing the plurality of control points on the probe face plane to thereby redefine the one or more lines, and extending a correspondingly redefined ribbon section from the one or more lines on the probe face plane toward the opposing probe face plane. The step of editing may further comprise

functions such as deleting one or more of the plurality of control points, changing a location of one or more of the plurality of control points, and adding one or more control points to the plurality of control points.

5 In a preferred embodiment, the ribbon section is perpendicular to the probe face plane and the ribbon section may extend from the probe face plane to the opposing probe face plane. The one or more lines forming the edge of the ribbon section may be edited through the plurality of control points to construct a plurality of open straight lines or a closed line geometrical figure, if desired. The ribbon section is preferably comprised of a plurality of planes. The ribbon section may or may not be parallel with respect to each
10 of a plurality of side faces of the probe.

In another embodiment of the present invention related to tracking a particular physical phenomena, such as a geological fault, the method may comprise the steps of positioning the probe face plane at a first position within the three-dimensional volume data set and forming a first set of control points on the probe face plane for tracking a
15 physical phenomena described by the three-dimensional volume data set. Another step may include interpolating between the first set of control points to define a first spline curve. Other steps may include moving the probe to a second position within the three-dimensional volume data set, forming a second set of control points on the probe face plane for tracking the physical phenomena and interpolating there between such that the
20 second set of control points define a second spline curve. Another step may include interpolating a three dimensional surface between the first spline curve and the second spline curve which is representative of the physical phenomena.

The method further permits displaying the interpolated surface where the surface intersects the first set of control points and the second set of control points. It is an
25 advantage of the present invention that the first spline curve, second spline curve and subsequent spline curves are curvilinear.

Additional steps may include the reiterative process of moving the probe to a third position within the three-dimensional volume data set, forming a third set of control points on the probe face plane for tracking the physical phenomena, interpolating
30 between the third set of control points to define a third spline curve, and interpolating

between the first spline curve, the second spline, and the third spline curve for further defining the three dimensional surface representative of the physical phenomena.

If desired, the method may further comprise steps such as editing the representative control points on the probe face plane at respective positions of the probe. Moreover, the method may include displaying a curvilinear connection ("v curves") between respective control points at respective positions of the probe. Another step may include displaying the spline curves and the v-curves on the three dimensional surface. The spline curves and the v-curves form a three dimensional grid also representative of the physical phenomena. The grid includes a plurality of intersections between the spline curves and the v-curves. The method may further comprise editing the current set of control points on the probe face plane, thereby reshaping the surface and grid between the current spline curve and the prior spline curve.

Preferably the method may also include steps such as selecting one of the plurality of intersections to thereby reposition the probe face plane to pass through the selected intersection. The method also comprises selecting one of the sets of control points to thereby reposition the probe face plane to pass through the selected set of control points.

Stated another way, an embodiment of the method may comprise steps such as positioning the probe face plane at a plurality of positions within the three-dimensional volume data set, forming a set of control points at each of the plurality of probe face plane positions such that each set of control points defines a related spline curve, repositioning the probe face plane and interpolating between the plurality of spline curves to form a three dimensional surface representative of the physical phenomena.

FEATURES AND ADVANTAGES

It is a feature of the present invention that a ribbon section through a 3D sampling probe can be created, redrawn, edited, and moved quickly and conveniently by creating a plurality of lines that are then projected through the 3D sampling probe. The lines may be drawn at angles offset from the coordinate system, such as an x, y, z or Cartesian coordinate system, of the 3D sampling probe.

It is another feature of the present invention that structures in a 3D data volume set, such as for instance geological structures, can be quickly mapped by selecting points

of interest at a plurality of locations in the 3D sampling probe, which points may then be interpolated to produce a grid or surface related to the structure. The grid may be quickly edited and the probe may be moved to various points on the surface by selecting grid intersections.

5 It is yet another feature of the present invention that, as a user interactively moves a 3D sampling probe through a 3D volume data set, the image on the surfaces of the 3D sampling probe is re-drawn "on the fly" so that the user perceives the image changing in real-time with movement of the 3D sampling probe. Similarly, as a user interactively moves a 3D sampling probe through a 3D volume data set, the 3D sampling probe is
10 volume rendered with varying degrees of transparency "on the fly" so that the user perceives the image changing in real-time with movement of the 3D sampling probe.

 It is a further feature of the present invention that a user can interactively change the shape or size of a 3D sampling probe so that the image on the surfaces of the 3D sampling probe is re-drawn "on the fly" so that the user perceives the image changing in
15 real-time with the change in shape or size of the 3D sampling probe. Similarly, a user can interactively change the shape or size of a 3D sampling probe so that the 3D sampling probe is volume rendered with varying degrees of transparency "on the fly" so that the user perceives the image changing in real-time with the change in shape or size of the 3D sampling probe.

20 It is yet a further feature of the present invention that a user can interactively rotate a 3D sampling probe so that the image on the surfaces of the 3D sampling probe is re-drawn "on the fly" so that the user perceives the image changing in real-time with the rotation of the 3D sampling probe. Similarly, a user can interactively rotate a 3D sampling probe so that the 3D sampling probe is volume rendered with varying degrees
25 of transparency "on the fly" so that the user perceives the image changing in real-time with the rotation of the 3D sampling probe.

 It is yet a further feature of the present invention that an eraser 3D sampling probe can be created and manipulated by the user to directly delete from an image selected points that fall within a certain datavalue range.

It is an advantage of the present invention that a user can manipulate a 3D sampling probe to interactively traverse a 3D volume data set to continuously follow and image a feature.

5 It is a further advantage of the present invention that a user can interactively change the displayed image in a continuous manner, without interruption or perceptible delay or lag. This allows a user to more quickly and accurately interpret and identify features inherent in 3D volume data sets.

10 It is yet a further advantage of the present invention that the 3D sampling probes can be interactively re-shaped by the user to match the shape of geologic features, thereby enabling the user to better visualize and define the extent of geologic features.

A still further advantage of the present invention is that it can be used to visualize and interpret large volumes of 3D seismic data. The present invention can be used to quickly and accurately identify drilling sites. The present invention can advantageously be used to sharply reduce 3D seismic project cycle times, to boost production from existing wells, and to locate additional reserves.

15

BRIEF DESCRIPTION OF THE FIGURES

The present invention is described with reference to the accompanying drawings. In the drawings, like reference numbers indicate identical or functionally similar elements. Additionally, the left-most digit(s) of a reference number identifies the drawing in which the reference number first appears.

20

FIG. 1 shows one embodiment of a software or program structure for implementing the present invention;

25 **FIG. 2** shows a block diagram of one embodiment of the 3D sampling probe program of the present invention;

FIG. 3 shows a curve illustrating opacity as a function of data value;

FIG. 4 shows a flow diagram illustrating one embodiment for implementing the present invention;

30 **FIG. 5** shows a flow diagram of one embodiment for changing a default probe;

- 5
- FIG. 6** shows a flow diagram of one embodiment for creating additional probes;
- FIG. 7** shows a flow diagram of one embodiment for moving a probe;
- FIG. 8** shows a flow diagram of one embodiment for re-shaping a probe;
- FIG. 9** shows a flow diagram of one embodiment for rotating a probe in 3D space;
- FIG. 10** shows a flow diagram of one embodiment for rotating a probe while fixed in space;
- 10 **FIG. 11** shows a flow diagram of one embodiment for carrying out auto picking or seed selection;
- FIG. 12** shows one embodiment of a computer system suitable for use with the present invention;
- FIG. 13** shows an alternate embodiment of a computer system suitable for use with the present invention;
- 15 **FIG. 14** shows further detail of an exemplary computer system suitable for use with the present invention;
- FIG. 15** illustrates three opaque probes of the present invention, with two of the probes intersecting each other;
- 20 **FIG. 16** illustrates three probes of the present invention, a data probe, a transparent cut probe, and a volume-rendered probe;
- FIG. 17** illustrates a ribbon section according to the present invention in the shape of a star;
- FIG. 18** shows a block diagram of a system for producing the ribbon section of FIG. 17;
- 25 **FIG. 19** illustrates a three dimensional grid and three dimensional surface representative of a physical phenomena described by a 3-D volume data set according to the present invention; and
- FIG. 20** shows a block diagram of a system for producing the grid and surface of FIG. 19.
- 30

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS**Overview**

The present invention is directed to a system and method for analyzing and imaging three-dimensional ("3D") volume data sets using a 3D sampling probe. 3D volume data sets comprise "voxels" or volume elements. Each voxel is a sample or point within a volume. Each voxel can be expressed in the form (x, y, z, datavalue) where "x, y, z" identifies the 3D location of the point within the volume, and "datavalue" is the value of some measured or calculated attribute or physical parameter at the specified point within the volume. For example, a 3D volume data set suitable for use with the present invention is 3D seismic data. Each voxel in a 3D seismic data can be expressed as (x, y, z, amplitude), with amplitude corresponding to the amplitude of reflected sound waves at the specified (x, y, z) location.

Any form of information that can be expressed in the voxel form (x, y, z, datavalue) is suitable for use with the present invention. In addition to seismic data, examples from the oil and gas industry include information from closely spaced well logs, gravity and magnetic fields, remote sensing data, and sidescan sonar image data. Other geologic or physical information could also include temperature, pressure, saturation, reflectivity, acoustical impedance, and velocity.

Another application for the present invention is for mining. For example, the present invention can be used to visualize and interpret geologic and geophysical data to locate mining sites, to locate and track deposits to be mined, or to locate and track geologic features such as faults that would affect mining operations. The present invention also has application for clean up of toxic, hazardous, or other types of waste. For example, the present invention can be used to visualize and interpret data representing the geographic extent and distribution of the waste at a particular site. Such visualization and interpretation is useful for prioritizing clean up at various sites, and for developing a clean-up plan for a particular site.

The present invention can also be used with information outside of the oil and gas industry. For example, the present invention can be used for analyzing and imaging in the medical field, where the datavalue element of the voxel is obtained from a CAT

(computerized axial tomography) scanner or a magnetic resonance imaging (MRI) procedure.

By way of explanation and example, the present invention will be described in detail below using 3D seismic data as the 3D volume data set. It is to be understood, however, that the present invention is not limited in any way to the use of 3D seismic data.

The present invention is particularly useful as a visualization tool for interpreting 3D seismic data. As used herein, the term "visualization" refers to the construction of a three-dimensional picture in the user's mind of physical or geologic features or physical parameters that are inherently present in 3D volume data sets. Such physical features or parameters are typically not apparent from conventional means of processing 3D data sets, such as scanning a series of cross-sections of the 3D volume data set, because of the mental reconstruction that needs to take place in order for a user to mentally "picture" the three-dimensional feature. Because of this mental reconstruction, it is difficult to communicate and share among users the same 3D image. For example, the same 3D mental image of the terrain will not necessarily be present in the mind of every person that reads or analyzes a two-dimensional ("2D") contour map of that terrain. Through the use of 3D computer graphics, users can visualize, and communicate and share, the same 3D image of 3D volume data sets. By visualizing 3D seismic data, a team of geologists, geophysicists, and engineers can interpret the visualized data to make exploration and production decisions, such as drilling locations and well paths.

To accomplish the visualization function, the present invention uses the computer graphics techniques of texture mapping and volume rendering. By "texture map" is meant wrapping or mapping a 2D picture or image onto a 2D or a 3D object. For example, a photograph of a person can be texture mapped onto a coffee cup.

The term "volume rendering" or "volume imaging" refers to drawing a three-dimensional object in a manner that conveys to a viewer the three-dimensional nature of the object, even though the viewer may be looking at a two-dimensional display or screen. Computer graphics technology makes use of coloring, lighting, and shading techniques to convey to the mind of the viewer what is high or low, behind or in front, light or dark, etc. The perspective or viewpoint can be changed so that the viewer can see

all sides of the 3D object. Volume rendering typically includes some type of transparency/opacity ($\text{opacity} = 1 - \text{transparency}$) control so that certain parts of the 3D object are more transparent, thereby allowing a viewer to "see through" outer surfaces of an object and view its internal structures.

5 The present invention enables fast visualization and analysis of very large 3D volume data sets through the use of a "sampling probe", also referred to herein as a "probe" or "probe object". As explained in more detail below, the sampling probes of the present invention have numerous attributes, one of which is that they are typically created as a 3D sub-volume of the whole 3D volume data set to be visualized and analyzed.

10 A number of sampling probes can be created, shaped, sized, and moved interactively by the user within the whole 3D volume data set. The intersection of the sampling probe with the whole 3D volume data set is texture mapped onto the surfaces of the sampling probe, or volume rendered with varying degrees of transparency within the sampling probe. As used herein, the term "interactive" or "interactively" refers to
15 changing or re-drawing an image in response to user input at a rate sufficiently fast that the user perceives an instantaneous or real-time change in the image, without perceptible delay or lag. In practice, a frame rate of at least about 10 to 15 frames per second is sufficient to achieve interactive imaging as described herein. For example, as the user moves the sampling probe, such as by "clicking and dragging" with a "mouse", the user
20 perceives the texture on the surfaces of the sampling probe changing in "real-time" with movement of the sampling probe. As the sampling probe changes shape, size, or location, there is no user-perceivable delay or lag in imaging the texture, or, with varying degrees of transparency, volume-rendered attributes. In this manner, the user can interactively move the sampling probes through the whole 3D volume, and more easily and effectively
25 visualize and interpret the features and physical parameters that are present within the geographic space represented by the whole 3D volume data set.

SYSTEM DESCRIPTION

30 The present invention may be implemented using hardware, software or a combination thereof, and may be implemented in a computer system or other processing system. One embodiment of a software or program structure 100 for implementing the

present invention is shown in FIG. 1. At the base of program structure 100 is an operating system 102. Suitable operating systems 102 include, for example, the UNIX® operating system, or Windows NT® from Microsoft Corporation, or other operating systems as would be apparent to one of skill in the relevant art.

5 Menu and windowing software 104 overlays operating system 102. Menu and windowing software 104 is used to provide various menus and windows to facilitate interaction with the user, and to obtain user input and instructions. Menu and windowing software 104 can include, for example, Microsoft Windows™, X Window System™ (registered trademark of Massachusetts Institute of Technology), and MOTIF™
10 (registered trademark of Open Software Foundation Inc.). As would be readily apparent to one of skill in the relevant art, other menu and windowing software could also be used.

 A basic graphics library 106 overlays menu and windowing software 104. Basic graphics library 106 is an application programming interface (API) for 3D computer graphics. The functions performed by basic graphics library 106 include, for example,
15 geometric and raster primitives, RGBA or color index mode, display list or immediate mode, viewing and modeling transformations, lighting and shading, hidden surface removal, alpha blending (translucency), anti-aliasing, texture mapping, atmospheric effects (fog, smoke, haze), feedback and selection, stencil planes, and accumulation buffer.

20 A particularly preferred basic graphics library 106 is OpenGL®, available from Silicon Graphics, Inc. ("SGI"), Mountain View, California. The OpenGL® API is a multiplatform industry standard that is hardware, window, and operating system independent. OpenGL® is designed to be callable from C, C++, FORTRAN, Ada and Java programming languages. OpenGL® performs each of the functions listed above for
25 basic graphics library 106. Some commands in OpenGL® specify geometric objects to be drawn, and others control how the objects are handled. All elements of the OpenGL® state, even the contents of the texture memory and the frame buffer, can be obtained by a client application using OpenGL®. OpenGL® and the client application may operate on the same or different machines because OpenGL® is network transparent. OpenGL®
30 is described in more detail in the OpenGL® Programming Guide (ISBN: 0-201-63274-8)

and the OpenGL® Reference Manual (ISBN: 0-201-63276-4), the entirety of both of which are incorporated herein by reference.

Visual simulation graphics library 108 overlays basic graphics library 106. Visual simulation graphics library 108 is an API for creating real-time, multi-processed 3D visual simulation graphics applications. Visual simulation graphics library 108 provides functions that bundle together graphics library state control functions such as lighting, materials, texture, and transparency. These functions track state and the creation of display lists that can be rendered later.

A particularly preferred visual simulation graphics library 108 is IRIS Performer, available from SGI in Mountain View, California. IRIS Performer supports the OpenGL® graphics library discussed above. IRIS Performer includes two main libraries, libpf and libpr, and four associated libraries, libpfdu, libpfdb, libpfui, and libpfutil.

The basis of IRIS Performer is the performance rendering library libpr, a low-level library providing high speed rendering functions based on GeoSets and graphics state control using GeoStates. GeoSets are collections of drawable geometry that group same-type graphics primitives (e.g., triangles or quads) into one data object. The GeoSet contains no geometry itself, only pointers to data arrays and index arrays. Because all the primitives in a GeoSet are of the same type and have the same attributes, rendering of most databases is performed at maximum hardware speed. GeoStates provide graphics state definitions (e.g., texture or material) for GeoSets.

Layered above libpr is libpf, a real-time visual simulation environment providing a high-performance multi-process database rendering system that optimizes use of multiprocessing hardware. The database utility library, libpfdu, provides functions for defining both geometric and appearance attributes of 3D objects, shares state and materials, and generates triangle strips from independent polygonal input. The database library libpfdb uses the facilities of libpfdu, libpf, and libpr to import database files in a number of industry standard database formats. The libpfui is a user interface library that provides building blocks for writing manipulation components for user interfaces (C and C++ programming languages). Finally, the libpfutil is the utility library that provides routines for implementing tasks such as MultiChannel Option support and graphical user interface (GUI) tools.

An application program that uses IRIS Performer and OpenGL® API typically carry out the following steps in preparing for real-time 3D visual simulation:

1. Initialize IRIS Performer;
2. Specify number of graphics pipelines, choose the
5 multiprocessing configuration, and specify hardware mode as needed;
3. Initialize chosen multiprocessing mode;
4. Initialize frame rate and set frame-extend policy;
5. Create, configure, and open windows as required; and
- 10 6. Create and configure display channels as required.

Once the application program has created a graphical rendering environment by carrying out steps 1 through 6 above, then the application program typically iterates through a main simulation loop once per frame.

7. Compute dynamics, update model matrices, etc.;
- 15 8. Delay until the next frame time;
9. Perform latency critical viewpoint updates;
10. Draw a frame.

A 3D sampling probe program **110** of the present inventions overlays visual
20 simulation graphics library **108**. Program **110** interacts with, and uses the functions carried out by, each of visual simulation and graphics library **108**, basic graphics library **106**, menu and windowing software **104**, and operating system **102** in a manner known to one of skill in the relevant art.

3D sampling probe program **110** of the present invention is preferably written in
25 an object oriented programming language to allow the creation and use of objects and object functionality. A particularly preferred object oriented programming language is C++. In carrying out the present invention, program **110** creates one or more probe "objects". As noted above, the probe objects created and used by program **110** are also referred to herein as sampling probes or probes. Program **110** manipulates the probe
30 objects so that they have the following attributes.

A probe corresponds to a sub-volume of a larger 3D volume. Particularly, a probe defines a sub-set that is less than the complete data set of voxels for a 3D volume data set. A probe could be configured to be equal to or coextensive with the complete data set of voxels for a 3D volume data set, but the functionality of the present invention is best carried out when the probe corresponds to a sub-volume and defines a sub-set that is less than the complete data set of voxels for a 3D volume data set. For example, a 3D volume data set of seismic data can contain from about 500 MB (megabytes) to about 10 GB (gigabytes) or more of data. A 2,500 square kilometer geographic space of typical 3D seismic data contains about 8 GB of data. A probe of the present invention for a 500 MB seismic data set would preferably contain about 10-20 MB of data.

By using probes that are a sub-volume of the larger 3D volume, the quantity of data that must be processed and re-drawn for each frame of an image is dramatically reduced, thereby increasing the speed with which the image can be re-drawn. The volume of a three-dimensional cube is proportional to the third power or "cube" of the dimensions of the three-dimensional cube. Likewise, the quantity of data in a 3D volume data set is proportional to the third power or "cube" of its size. Therefore, the quantity of data in a sub-volume of a larger 3D volume will be proportional to the "cubed root" ($\sqrt[3]{}$) of the quantity of data in the larger 3D volume. As such, the quantity of data in a probe of the present invention will be proportional to the "cubed root" ($\sqrt[3]{}$) of the quantity of data in the 3D volume of which it is a sub-volume. By only having to process the sub-set of data that relates to the sub-volume of the probe, the present invention can re-draw an image in response to user input at a rate sufficiently fast that the user perceives an instantaneous or real-time change in the image, without perceptible delay or lag.

The probes of the present invention can be interactively changed in shape and/or size, and interactively moved within the larger 3D volume. The outside geometry or surfaces of a probe can be interactively drawn opaque or texture mapped while the probe is being changed in shape and/or size or while the probe is being moved. The probe can be drawn or volume rendered with varying degrees of transparency while the probe is being changed in shape and/or size or moved, thereby revealing the internal structures or features of the probe.

The 3D sampling probes of the present invention can have any shape, including rectangular shapes having one or more right angles and non-rectangular shapes having no right angles. The 3D sampling probes of the present invention can have orthogonal or perpendicular planes as outer surfaces (e.g., squares and rectangles), parallel planes as
5 outer surfaces (e.g., parallelograms), or curved outer surfaces (e.g., spheres, ovals, or cylinders). The present invention is not limited to 3D sampling probes of any particular shape. The 3D sampling probes of the present invention can have arbitrary shapes, such as the shape of a geologic feature identified by a user. For example, as a user moves the 3D sampling probe through a 3D volume of seismic data, a geologic feature may be
10 visualized and identified by the user. The 3D sampling probe can be interactively re-shaped by the user to match the shape of the geologic feature, thereby enabling the user to better visualize and define the extent of that geologic feature.

A probe can be used to cut into another probe, and the intersection of the two probes can be imaged. A probe can be used to highlight data in accordance with a seed
15 selection algorithm. A probe can also be used to "erase" or delete data in accordance with a seed de-selection algorithm. These attributes will be explained in more detail below.

FIG. 2 shows a block diagram of one embodiment of 3D sampling probe program
110. Program 110 includes a User Interface Module (UIM) 210, a Graphics Processing Module (GPM) 220, and a Volume Sampling Module (VSM) 230. A 3D volume data
20 set is illustrated as data volume 240, also referred to herein as a 3D volume. UIM 210 and GPM 220 communicate via a bi-directional pathway 212. GPM 220 sends instructions and requests for data to VSM 230 via pathway 222. UIM 210 sends instructions and requests to VSM 230 via pathway 214. UIM 210 interacts with data volume 240 through pathway 216.

25 Voxel data from data volume 240 is transferred to VSM 230 via data pathway 234. VSM 230 transfers data to GPM 220 via data pathway 232. Data volume 240 stores the 3D volume data set in a manner well known to one of skill in the relevant art. For example, the format for data volume 240 can consist of two parts, a volume header followed by the body of data that is as long as the size of the data set. The volume header
30 typically contains information, in a prescribed sequence, such as the file path (location) of the data set, size, dimensions in the x, y, and z directions, annotations for the x, y, and

z axes, annotations for the data value, etc. The body of data is a binary sequence of bytes, one or more bytes per data value, that can be ordered in the following manner. The first byte is the data value at volume location $(x, y, z) = (0, 0, 0)$. The second byte is the data value at volume location $(1, 0, 0)$, the third byte is the data value at volume location $(2, 0, 0)$, etc. When the x dimension is exhausted, then the y dimension is incremented, and finally the z dimension is incremented. The present invention is not limited in any way to a particular data format for data volume **240**.

User Interface Module **210** handles the user interface to receive commands, instructions, and input data from the user. UIM **210** interfaces with the user through a variety of menus through which the user can select various options and settings, either through keyboard selection or through one or more user-manipulated input devices, such as a "mouse", or a 3D pointing device. UIM **210** receives user input as the user manipulates the input device to move, size, shape, etc. a 3D sampling probe.

The primary functions carried out by UIM **210** will now be described. UIM **210** inputs from the user the identification of one or more 3D volume data sets (represented by data volume **240**) to use for imaging and analysis. When a plurality of data volumes are used, the data value for each of the plurality of data volumes represents a different physical parameter or attribute for the same geographic space. By way of example, a plurality of data volumes could include a geology volume, a temperature volume, and a water-saturation volume. The voxels in the geology volume can be expressed in the form $(x, y, z, \text{seismic amplitude})$. The voxels in the temperature volume can be expressed in the form $(x, y, z, ^\circ\text{C})$.

The voxels in the water-saturation volume can be expressed in the form $(x, y, z, \text{\%saturation})$. The physical or geographic space defined by the voxels in each of these volumes is the same. However, for any specific spatial location (x_0, y_0, z_0) , the seismic amplitude would be contained in the geology volume, the temperature in the temperature volume, and the water-saturation in the water-saturation volume.

UIM **210** inputs from the user information to create one or more 3D sampling probes. Such information includes size, shape, and initial location of the probe. Such information can also include imaging attributes such as color, lighting, shading, and transparency (or opacity). By adjusting opacity as a function of data value, certain

portions of the data volume are more transparent, thereby allowing a viewer to see through surfaces. An exemplary opacity curve 300 is shown in FIG. 3. Opacity curve 300 illustrates opacity (1-transparency) as a function of datavalue. As would be readily apparent to one skilled in the art, datavalues with greater opacity (less transparency) will mask the imaging or display of datavalues with lower opacity (more transparency). Conversely, datavalues with less opacity and greater transparency will permit the imaging or display of datavalues with greater opacity and lower transparency.

UIM 210 receives input from the user for sizing and shaping the 3D sampling probes. As described in more detail below, in a preferred embodiment of the present invention, the user changes the shape and/or size of a probe by clicking onto "sizing tabs" on the probe, and making changes in the dimensions of the probe in one or more directions. UIM 210 receives input from the user to move the position or location of a 3D sampling probe within the data volume. In a preferred embodiment, a user manipulates a mouse to "click" onto a surface of the probe to be moved, and then moves the mouse to move the probe throughout the geographic space defined by the data volume.

UIM 210 receives input from the user to carry out "auto picking" processes. In an auto picking process, data points (voxels) are selected based upon a selection algorithm. In a preferred embodiment, the selection algorithm is based upon a seed point within the 3D data volume. The selection algorithm then selects data points that: (i) satisfy the selection criteria or algorithm (e.g., have a datavalue within a specified filter range); and (ii) have a connectivity with or are connected to the seed point. Through UIM 210, the user is prompted to identify a seed point within the 3D volume, and to identify a filter range of datavalues used by the selection algorithm to "pick" the selected points. Preferably, the seed point is within one of the 3D sampling probes.

UIM 210 also receives input from the user regarding the content of the displayed image. For example, the user can preferably select the content of the displayed image. The content of the displayed image could include only the 3D sampling probe, i.e., its intersection with the 3D volume. Additionally, the 3D sampling probe could be displayed either with or without a bounding box that defines the outer geometry of the probe. Alternatively, the displayed image could include the 3D sampling probe, as well

as the data that occupies the background xz, yz, and xy planes, and/or the data that occupies the 3D volume outside of the 3D sampling probe(s) being displayed.

To carry out the foregoing functions, UIM **210** sends a request to Volume Sampling Module 230 to load or attach those 3D volume data sets identified by the user. UIM **210** communicates via pathway **212** with Graphics Processing Module **220** that carries out the display and imaging.

The primary functions carried out by GPM **220** will now be described. GPM **220** processes data for imaging of 3D sampling probes with the color, lighting, shading, transparency, and other attributes selected by the user. To do so, GPM **220** uses the functions available through basic graphics library **106** and visual simulation graphics library **108** described above. The user can select (through UIM **210**) to display only the one or more 3D sampling probes that have been created. Alternatively, the user can select to display one or more 3D sampling probes, as well as the 3D data volume outside of the probes, i.e. voxels within the 3D volume that do not intersect any of the 3D sampling probes that are being displayed. 3D sampling probes that are being displayed are referred to herein as "active probes".

GPM **220** processes the re-shaping and move requests that are received by UIM **210** from the user. GPM **220** draws the re-shaped 3D sampling probe in accordance with the user-selected attributes (color, lighting, shading, transparency, etc.). As the user inputs a change in shape for a 3D sampling probe, the image with selected attributes is re-drawn sufficiently fast to be perceived as real-time by the user. Similarly, GPM **220** draws the 3D sampling probe in the new position or location in accordance with the user-selected attributes (color, lighting, shading, transparency, etc.). As the user moves the 3D sampling probe through the 3D volume, the image of the 3D sampling probe with selected attributes is re-drawn sufficiently fast to be perceived as real-time by the user.

GPM **220** processes "auto picking" requests that are received by UIM **210**. GPM **220** will image selected points within the 3D volume in accordance with the selection algorithm. Alternatively, GPM **220** will "erase" selected points within the 3D volume in accordance with the selection algorithm.

To carry out the foregoing functions, GPM **220** communicates via pathway **212** with UIM **210** so that the information requested by the user is imaged or displayed with

the selected attributes. GPM 220 obtains the needed data from data volume 240 by sending a data request via pathway 222 to Volume Sampling Module (VSM) 230.

5 The primary function of VSM 230 is to extract the appropriate data from data volume 240 at the request of GPM 220. VSM 230 receives requests for data from GPM 220 via pathway 222. VSM 230 extracts the required data from data volume 240 and transfers the data to GPM 220 via data pathway 232 for processing and display. VSM 230 also receives instructions from UIM 210 via pathway 214 to load or attach the 3D data volumes identified by the user.

Turning now to FIG. 4, a flow diagram 400 illustrating one embodiment for implementing the present invention is shown. A start up or initialization process is shown in a step 402. In step 402, the user specifies the one or more data volumes (240) to be used. The specified 3D volume data sets are loaded from disk into main memory (a description of hardware suitable for carrying out the present invention will be described in more detail below). A default 3D sampling probe is created, and drawn.
15 The default 3D sampling probe is a sub-volume of the specified 3D volume(s) of arbitrary size and shape. The present invention is not limited to any particular size or shape for the default 3D sampling probe.

By way of example of the present invention, the default 3D sampling probe can be a square (having equal dimensions in the x, y, and z directions). To draw the square default 3D sampling probe, the bounding geometry is first drawn with one edge of the bounding geometry located on the z axis. Data is then extracted from data volume 240 by VSM 230 to draw the image of the intersection of the square default 3D sampling probe with the 3D volume (data volume 240). Particularly, data is extracted that corresponds to the intersection of the square default 3D sampling probe with the 3D volume in the xz, yz, and xy planes. This data is then sent by VSM 230 to GPM 220 so that it can be texture mapped onto the planes of the bounding box to provide an image of the square default 3D sampling probe.
20
25

In one embodiment of the present invention, the data that occupies the background xz, yz, and xy planes themselves, as well as the data that occupies the 3D volume outside of the default 3D sampling probe, are also imaged or displayed (in addition to the default 3D sampling probe) during start up step 402. Alternatively, start
30

up step **402** can be carried out so that the data that occupies the background xz, yz, and xy planes, or the data that occupies the 3D volume outside of the default 3D sampling probe, is not displayed or imaged. Preferably, the present invention is carried out so that the user can selectively display, or not display, the data that occupies the background xz, yz, and xy planes, as well as the data that occupies the 3D volume outside of the active probes.

In a step **404**, UIM **210** is waiting to respond to user input or request. User input is received through a user input device suitable for use with a computer, including but not limited to, a keyboard, mouse, joystick, trackball, rollerball, roller point, or other type of suitable pointing device, etc. Preferably, the user input device comprises a mouse or other similar device that enables the user to "click" on a particular displayed image, and "drag" that displayed image to another location. Such a user input device allows a user to move and re-shape displayed probes. Such a user input device also allows a user to activate drop-down menus, and to select the various options for the color, shading, lighting, and transparency attributes. A keyboard can also be used for entering information relating to the selected attributes.

Reference numeral **406** refers generally to a plurality of functions that can be carried out by the present invention. These functions can be carried out individually or simultaneously, depending upon input from the user. For example, a probe can be moved (function **430**) and rotated (function **450**) simultaneously. While the functions identified by reference numeral **406** are being carried out, the image of the 3D sampling probes is being re-drawn sufficiently fast to be perceived as real-time by the user. Each of the functions identified by reference numeral **406** will now be described.

If a user wants to change the default probe, then function **410** is carried out. The steps for carrying out function **410** are shown in FIG. 5 by way of flow diagram connector 5A. In a step **502**, the changes to the default probe are input by UIM **210** from the user. For example, the changes to the default probe can be to the shape or size, the location, or the attributes such as color, shading, lighting, and transparency.

In a step **504**, UIM **210** sends a request to GPM **220** to draw the changed default probe. In a step **506**, GPM **220** requests data for the changed default probe from VSM **230**. In making this request, GPM **220** would invoke function **430** if it was necessary to

move the default probe, function **440** to re-shape the default probe, and functions **450** or **460** to rotate the default probe. The foregoing functions will be described in more detail below.

5 The data that will be extracted from data volume **240** by VSM **230** in response to the request made by GPM **220** in step **506** will depend upon attributes that have been selected by the user. If the opacity settings selected by the user are such that all data values are opaque, then the data extracted by VSM **230** will be limited to the surfaces of the changed default probe. Because of the selected opacity, it will not be possible for the user to see inside the changed default probe, so only the data corresponding to the surfaces or outside of the changed default probe will be extracted by VSM **230**. In a step **508**, GPM **220** processes the data extracted by VSM **230** for the surfaces of the changed default probe, and draws the changed default probe by texture mapping onto the surfaces in accordance with the attributes selected by the user. By extracting only the data that can be seen by the user, the image of the changed default probe can be drawn more quickly because less data needs to be processed, i.e., the data corresponding to the "inside" of the changed default probe is not processed.

Alternatively, if the opacity settings selected by the user are such that some of the data values are opaque and some of the data values are transparent, then the data extracted by VSM **230** will include the data corresponding to the entire volume of the changed default probe. Because of the selected opacity and transparency, it will be possible for the user to see inside the changed default probe, so data corresponding to the entire volume of the changed default probe will be extracted by VSM **230**. In such a situation, GPM **220** processes the data extracted by VSM **230** in step **508**, and draws the changed default probe by volume rendering in accordance with the attributes selected by the user.

25 If a user wants to create additional probes, then function **420** is carried out. The present invention is not limited to any particular number of active probes. The steps for carrying out function **420** are shown in FIG. 6 by way of flow diagram connector 6A. In a step **602**, the shape, size, location, attributes, etc. for the additional probes are input by UIM **210** from the user. In a step **604**, UIM **210** sends a request to GPM **220** to draw the additional probes.

In a step **606**, GPM **220** requests data for the additional probes from VSM **230**. In a manner similar to that described above for changing the default probe, the data that is extracted from 3D or data volume **240** by VSM **230** will depend upon the opacity selected by the user for the additional probes. If the opacity settings selected by the user are such that all data values for the additional probes are opaque, then the data extracted by VSM **230** will be limited to the surfaces of the additional probes. Alternatively, if the opacity settings selected by the user for the additional probes are such that some of the data values are opaque and some of the data values are transparent, then the data extracted by VSM **230** will include the data corresponding to the entire volumes of the additional probes. In this manner, the additional probes can be drawn more quickly by minimizing the quantity of data that must be processed.

In a step **608**, GPM **220** processes the data extracted by VSM **230** for the additional probes, and draws the additional probes in accordance with the attributes selected by the user, either by texture mapping onto the surfaces of the additional probes, or by volume rendering the entire volume of the additional probes.

If a user wants to move a probe, then function **430** is carried out. The steps for carrying out function **430** are shown in FIG. 7 by way of flow diagram connector 7A. In a step **702**, the new location for the probe is input by UIM **210** from the user. In a preferred embodiment of the present invention, the user inputs the new location of the probe by clicking a mouse or other type of suitable user input device to snap a pointer onto a surface of the probe to be moved. The user changes the location of the probe by moving the mouse or other suitable user input device in any direction, thereby dragging the probe along a trajectory.

In a step **704**, UIM **210** sends a move request to GPM **220** to draw the probe at the new location. GPM **220** requests data for the new location of the probe from VSM **230**. In a manner similar to that described above, the data that is extracted from data volume **240** by VSM **230** will depend upon the opacity selected by the user for the probe being moved. If the opacity settings selected by the user are such that all data values for the probe being moved are opaque, then the data extracted by VSM **230** will be limited to the surfaces of the probe being moved. Alternatively, if the opacity settings selected by the user for the probe being moved are such that some of the data values are opaque

and some of the data values are transparent, then the data extracted by VSM 230 will include the data corresponding to the entire volume of the probe being moved. In this manner, the probe can be drawn at its new location more quickly by minimizing the quantity of data that must be processed.

5 In a step 708, GPM 220 processes the data extracted by VSM 230 for the probe being moved, and draws the probe at its new location in accordance with the attributes selected by the user, either by texture mapping onto the surfaces of the probe being moved, or by volume rendering the entire volume of the probe being moved.

10 As the user moves the probe, for each new location of the probe, steps 702 through 708 are repeated at a rate sufficiently fast that the user perceives the image of the probe, with texture mapping or volume rendering as appropriate, changing in "real-time" with movement of the probe. The image is being re-drawn at a frame rate sufficiently fast to be perceived as real-time by the user.

15 If a user wants to re-shape a probe, then function 440 is carried out. As used herein, the term "re-shape" refers to any change in dimension of a 3D sampling probe in any direction. The shape of a 3D sampling probe can be changed, or re-shaped, for example, by changing the size in one or more directions, such as by changing a square probe into a rectangular probe by increasing the size of the probe in the x direction, and decreasing the size of the probe in the y direction. As another example, the shape of a 20 3D sampling probe can be changed by changing the shape from spherical to rectangular. As yet another example, a square 3D sampling probe (equal dimensions in the x, y, and z directions) can be re-shaped in accordance with the present invention to be a larger or smaller square-shaped probe by changing the size equally in each of the x, y, and z directions. The re-shaped probe also has a square shape, but as a larger or smaller square.

25 The steps for carrying out function 440 are shown in FIG. 8 by way of flow diagram connector 8A. In a step 802, the new shape and/or size for the probe is input by UIM 210 from the user. In a preferred embodiment of the present invention, the user inputs the new shape of a probe by clicking a mouse or other type of suitable user input device to snap a pointer onto a "sizing tab" of the probe to be re-shaped. As used herein, 30 a "sizing tab" refers to a designated area on a surface of the probe. Such a designated area is preferably displayed in a color that is different from the colors being used to

display the features or physical parameters of the 3D volume data set. When the pointer is snapped to the sizing tab, manipulation of the mouse or user input device changes the dimensions or proportions of the surface on which the sizing tab is located. When the desired size or shape is reached, the user again clicks the mouse or user input device to
5 release the pointer from the sizing tab. Sizing tabs are illustrated in FIGS. 15 and 16. The sizing tabs are the small dark squares that appear on the surfaces of the probes, along the bounding geometry of the probes. The location of the sizing tabs is not limited to the bounding geometry of the probes. The user changes the shape of the probe by clicking the mouse or other suitable user input device onto a sizing tab, moving the mouse until
10 the surface being changed has the desired shape, and then releasing the mouse from the sizing tab. This process can be repeated, if necessary, using other sizing tabs on the probe until the probe is re-shaped to the desired shape.

It would be readily apparent to one of skill in the relevant art how to implement such a sizing tab for re-shaping the probes of the present invention. It is to be
15 understood, however, that the present invention is not limited to the use of sizing tabs for re-shaping probes, and other suitable methods can be used. For example, the user could select from a number of pre-set shapes (e.g., squares, rectangle, cylinders, spheres) by activating a drop-down menu, or by scrolling through the shapes by repeatedly clicking a mouse.

20 In a step **804**, UIM **210** sends a re-shape request to GPM **220** to draw the re-shaped probe. In a step **806**, it is determined whether more data is needed to draw the re-shaped probe. For example, if the re-shaped probe is of a shape and size that "fits inside" the existing probe, then no more data is needed, and processing continues at a step **810**. Alternatively, if the re-shaped probe is of a shape and size that falls at least partially
25 outside of the existing probe, then, in a step **808**, GPM **220** requests the data needed for the re-shaped probe from VSM **230**. In a manner similar to that described above, the data that is extracted from 3D or data volume **240** by VSM **230** will depend upon the opacity selected by the user for the probe being re-shaped. If the opacity settings selected by the user are such that all data values for the probe being re-shaped are opaque, then the data
30 extracted by VSM **230** will be limited to the surfaces of the probe being re-shaped. Alternatively, if the opacity settings selected by the user for the probe being re-shaped

are such that some of the data values are opaque and some of the data values are transparent, then the data extracted by VSM 230 will include the data corresponding to the entire volume of the probe being re-shaped. In this manner, the probe can be drawn with its new shape more quickly by minimizing the quantity of data that must be processed.

In step 810, GPM 220 processes the data extracted by VSM 230 for the probe being re-shaped, and draws the probe with its new shape in accordance with the attributes selected by the user, either by texture mapping onto the surfaces of the probe being re-shaped, or by volume rendering the entire volume of the probe being re-shaped.

As the user changes the shape of the probe, steps 802 through 810 are repeated at a rate sufficiently fast that the user perceives the image of the probe, with texture mapping or volume rendering as appropriate, changing in "real-time" with the changing shape of the probe. The image is being re-drawn at a frame rate sufficiently fast to be perceived as real-time by the user.

If a user wants to rotate a probe in 3D space, then function 450 is carried out. In function 450, the 3D orientation, which is the same for both the 3D volume and the probe, is changed, thereby rotating the 3D volume and the probe in space. The steps for carrying out function 450 are shown in FIG. 9 by way of flow diagram connector 9A. In a step 902, the new 3D orientation for the 3D volume and the probe is input by UIM 210 from the user. In a preferred embodiment of the present invention, the user inputs the new orientation by clicking a mouse or other type of suitable user input device to snap a pointer onto an axis of the probe to be rotated. Manipulation of the mouse or user input device changes the orientation of that axis. When the desired orientation is reached, the user again clicks the mouse or user input device to release the pointer from the axis. It would be readily apparent to one of skill in the relevant art how to implement such a change in orientation. It is to be understood, however, that the present invention is not limited to changing the orientation in this manner. For example, the user could select from a number of pre-set rotations (e.g., rotate 90° to the left or right; rotate 45° to the left or right, etc.) by activating a drop-down menu, or by scrolling through the rotations by repeatedly clicking a mouse.

In a step 904, UIM **210** sends a request to rotate in 3D space to GPM **220** to draw the rotated probe. In a step **906**, GPM **220** requests data for the rotated probe from VSM **230**. In a manner similar to that described above, the data that is extracted from 3D or data volume **240** by VSM **230** will depend upon the opacity selected by the user for the probe being rotated. If the opacity settings selected by the user are such that all data values for the probe being rotated are opaque, then the data extracted by VSM **230** will be limited to the surfaces of the probe being rotated. Alternatively, if the opacity settings selected by the user for the probe being rotated are such that some of the data values are opaque and some of the data values are transparent, then the data extracted by VSM **230** will include the data corresponding to the entire volume of the probe being rotated. In this manner, the probe can be drawn with its new orientation more quickly by minimizing the quantity of data that must be processed.

In step **908**, GPM **220** processes the data extracted by VSM **230** for the probe being rotated, and draws the probe with its new orientation in accordance with the attributes selected by the user, either by texture mapping onto the surfaces of the probe being rotated, or by volume rendering the entire volume of the probe being rotated.

As the user rotates the probe in 3D space, steps **902** through **908** are repeated at a rate sufficiently fast that the user perceives the image of the probe, with texture mapping or volume rendering as appropriate, changing in "real-time" with the changing orientation of the probe. The image is being re-drawn at a frame rate sufficiently fast to be perceived as real-time by the user.

If a user wants to rotate a probe while it is fixed in 3D space, then function **460** is carried out. In function **460**, the 3D orientation of the probe is rotated independently of the 3D orientation of the 3D volume, thereby rotating the probe while it is fixed in the 3D space defined by the orientation of the 3D volume. In this manner, the background planes for an active probe can be displayed in a fixed orientation, and the active probe can be rotated within the background planes.

The steps for carrying out function **460** are shown in FIG. 10 by way of flow diagram connector 10A. In a step **1002**, the new 3D orientation for the probe is input by UIM **210** from the user. In a preferred embodiment of the present invention, the user selects the option to rotate while fixed in space, for example, from a "drop-down" menu.

The user then inputs the new orientation for the probe by clicking a mouse or other type of suitable user input device to snap a pointer onto an axis of the probe to be rotated. Manipulation of the mouse or user input device changes the orientation of that axis. When the desired orientation is reached, the user again clicks the mouse or user input device to release the pointer from the axis. It would be readily apparent to one of skill in the relevant art how to implement such a change in orientation. It is to be understood, however, that the present invention is not limited to changing the orientation in this manner. For example, the user could select from a number of pre-set rotations (e.g., rotate 90° to the left or right; rotate 45° to the left or right, etc.) by activating a drop-down menu, or by scrolling through the rotations by repeatedly clicking a mouse.

In a step **1004**, UIM **210** sends a request to rotate while fixed in space to GPM **220** to draw the rotated probe. In a step **1006**, GPM **220** requests data for the rotated probe from VSM **230**. In a manner similar to that described above, the data that is extracted from 3D or data volume **240** by VSM **230** will depend upon the opacity selected by the user for the probe being rotated. If the opacity settings selected by the user are such that all data values for the probe being rotated are opaque, then the data extracted by VSM **230** will be limited to the surfaces of the probe being rotated. Alternatively, if the opacity settings selected by the user for the probe being rotated are such that some of the data values are opaque and some of the data values are transparent, then the data extracted by VSM **230** will include the data corresponding to the entire volume of the probe being rotated. In this manner, the probe can be drawn with its new orientation more quickly by minimizing the quantity of data that must be processed.

In step **1008**, GPM **220** processes the data extracted by VSM **230** for the probe being rotated, and draws the probe with its new orientation in accordance with the attributes selected by the user, either by texture mapping onto the surfaces of the probe being rotated, or by volume rendering the entire volume of the probe being rotated.

As the user rotates the probe while it is fixed in space, steps **1002** through **1008** are repeated at a rate sufficiently fast that the user perceives the image of the probe, with texture mapping or volume rendering as appropriate, changing in "real-time" with the changing orientation of the probe. The image is being re-drawn at a frame rate sufficiently fast to be perceived as real-time by the user.

If a user wants to carry out an "auto picking" process, then function **470** is carried out. The steps for carrying out function **470** are shown in FIG. 11 by way of flow diagram connector 11A. In a step **1102**, a seed point within the data set of the 3D volume, and a selection criteria based on datavalues, are input by UIM **210** from the user. Preferably the seed point is within the data set of voxels that defines a probe. As described below, such a probe is referred to herein as a seed 3D sampling probe or an eraser 3D sampling probe. However, the seed point can be within the data set of voxels that defines the 3D volume, outside of an active probe. In a preferred embodiment of the present invention, the user selects the option to execute an auto picking process, for example, from a "drop-down" menu. The user then selects the seed point by clicking a mouse or other type of suitable user input device to snap a pointer onto the desired seed point. The selection criteria can be input, for example, by graphically selecting a range, or by keying in specific numerical values. It would be readily apparent to one of skill in the relevant art how to input from the user a seed point and filter range of datavalues.

In a step **1104**, UIM **210** sends an auto picking request to GPM **220** to draw the rotated probe. In a step **1106**, GPM **220** requests selected points to image from VSM **230**. The selected points are those that are connected to the seed point, and that have a datavalue within the selection criteria.

In step **1108**, GPM **220** processes the data extracted by VSM **230** to draw the selected points. The selected points are preferably highlighted by being drawn in a color different from those used to depict the features or physical parameters of the 3D volume data set. Alternatively, step **1108** can be carried out to "erase" or delete from the image the selected points.

In a similar manner, auto picking function **470** can be used to "erase" or de-select points. For example, an eraser 3D sampling probe is defined, such as by invoking function **420** to create an additional probe. A "de-selection" criteria based on datavalues is defined. Points previously selected by an auto picking operation that satisfy the de-selection criteria are identified as candidates for de-selection. As the eraser 3D sampling probe moves through the 3D volume, the de-selected points are deleted from the image, and the image is re-drawn sufficiently fast to be perceived as real-time by the user.

Once auto picking function **470** is initiated by the user, it can be carried out simultaneously with, for example, move function **430**. In this manner, as the user moves the probe, steps **1102** through **1108** (and steps **702** through **708**) are repeated at a rate sufficiently fast that the user perceives the image of the probe, with the selected points, changing in "real-time" with the changing location of the probe. As the probe is moved, the selected points can be highlighted by being drawn in a suitable color, thereby having the auto-picking 3D sampling probe function as a "highlighter" as it moves through the 3D volume. Alternatively, as the probe is moved, points previously selected by an auto picking operation can be "erased" or deleted from the image, thereby having the probe function as an "eraser" or eraser 3D sampling probe as it moves through the 3D volume. In either embodiment, the image is being re-drawn at a frame rate sufficiently fast to be perceived as real-time by the user.

If a user wants to create a "ribbon section," then function **480** is performed. The steps necessary for performing function **480** are described further below in reference to FIG. 17 and by way of block diagram connector 18A in FIG. 18.

If a user wants to create a "3D surface" representative of a physical phenomena found within a 3D volume data set, then function **490** is performed. The steps necessary for performing function **490** are described further below in reference to FIG. 19 and by way of block diagram connector 20A in FIG. 20.

In any event where a user desires to carry out one or more of the functions described above such as move probe (**430**), re-shape probe (**440**), create a ribbon section (**480**) and create a 3D surface (**490**), each function can be performed independent of, or in connection with, one or more of the other functions.

With reference now to FIG. 12, one embodiment of a computer system suitable for use with the present invention is shown. A graphics supercomputer **1210** contains one or more central processing units (CPU) or processors **1212**. Supercomputer **1210** contains a random access memory (RAM) **1214** that can be accessed by processors **1212**. Supercomputer **1210** also contains one or more graphics modules **1216** that also access RAM **1214**. Graphics modules **1216** execute the functions carried out by Graphics Processing Module **220**, using hardware (such as specialized graphics processors) or a

combination of hardware and software. A user input device **1218** allows a user to control and input information to graphics supercomputer **1210**.

A particularly preferred graphics supercomputer is an Onyx2 Infinite Reality system, available from Silicon Graphics, Inc., Mountain View, CA, configured with eight
5 processors, three graphics pipelines, 16 GB of main memory, and 250 GB of disk memory. Such a graphics supercomputer has a scalable, high-bandwidth, low-latency architecture to provide high speed rendering on multiple graphics pipelines. Graphics supercomputers from other vendors, such as Hewlett-Packard Company of Palo Alto, CA or Sun Microsystems of Mountain View, CA could also be used.

10 The graphics data forming the image to be displayed is sent from graphics supercomputer **1210** to a multiple-screen display system **1220** for projection onto a screen **1230**. In the embodiment shown in FIG. 12, three projectors are used. From the perspective of a user viewing the image on screen **1230**, the three projectors include a left projector **1240**, a center projector **1250**, and a right projector **1260**. Although three
15 projectors are shown, the present invention is not limited to the use of any particular number of projectors.

Projector **1240** has a projection field on screen **1230**, shown generally at **1242**, between a point **1241** and a point **1243**. Projector **1250** has a projection field on screen **1230**, shown generally at **1252**, between a point **1251** and a point **1253**. Projector **1260**
20 has a projection field on screen **1230**, shown generally at **1262**, between a point **1261** and a point **1263**. Projection fields **1242** and **1252** have an overlap region **1244**, between points **1251** and **1243**. Similarly, projection fields **1262** and **1252** have an overlap region **1264**, between points **1261** and **1253**. The image to be displayed is divided into three (left, center, and right) over-lapping sub-images. By simultaneously projecting the three
25 over-lapping sub-images, the field-of-view to the user is increased over that available, for example, on a monitor or through the use of just one projector. As an example, use of the three over-lapping sub-images shown in FIG. 12 increases the field-of-view to approximately 160°. Overlap regions **1244** and **1264** are each approximately 5.3°. Multiple-screen display system **1220** accounts for overlap regions **1244** and **1264** in a
30 well-known manner to edge-blend the images of the three projectors to form one

seamless image on screen **1230**. Suitable display and projector systems are available from SEOS, London, England, such as the Barco projector units.

FIG. 13 shows an alternate embodiment of a computer system suitable for use with the present invention. In the embodiment shown in FIG. 13, graphics
5 supercomputer **1210** is configured with multiple processors **1212**, RAM **1214**, and two graphics modules **1216**. Graphics workstations suitable for use in the embodiment shown in FIG. 13 are available from Silicon Graphics, Inc. or Sun Microsystems. Each graphics module **1216** is connected to a monitor **1320** for display. Monitor **1320** should preferably be a color graphics monitor suitable for display of graphics such as that shown in FIGS.
10 15 and 16. Preferably, one of monitors **1320** displays the image of the 3D sampling probes, and the other of monitors **1320** displays the various menus used to operate 3D sampling probe program 110. FIG. 13 also shows a keyboard **1330** and a mouse **1332** that function as user input devices.

A computer system capable of carrying out the functionality described herein is shown in more detail in FIG. 14. Computer system **1402** includes one or more
15 processors, such as processor **1404**. Processor **1404** is connected to a communication bus **1406**. Various software embodiments are described in terms of this exemplary computer system. After reading this description, it will become apparent to a person skilled in the relevant art how to implement the invention using other computer systems and/or computer architectures.
20

Computer system **1402** also includes a main memory **1408**, preferably random access memory (RAM), and can also include a secondary memory **1410**. Secondary memory **1410** can include, for example, a hard disk drive **1412** and/or a removable storage drive **1414**, representing a floppy disk drive, a magnetic tape drive, an optical disk drive, etc.
25 Removable storage drive **1414** reads from and/or writes to a removable storage unit **1418** in a well known manner. Removable storage unit **1418**, represents a floppy disk, magnetic tape, optical disk, etc. which is read by and written to by removable storage drive **1414**. As will be appreciated, removable storage unit **1418** includes a computer usable storage medium having stored therein computer software and/or data.

30 In alternative embodiments, secondary memory **1410** may include other similar means for allowing computer programs or other instructions to be loaded into computer

system **1402**. Such means can include, for example, a removable storage unit **1422** and an interface **1420**. Examples of such can include a program cartridge and cartridge interface (such as that found in video game devices), a removable memory chip (such as an EPROM, or PROM) and associated socket, and other removable storage units **1422** and interfaces **1420** which allow software and data to be transferred from removable storage unit **1422** to computer system **1402**.

Computer system **1402** can also include a communications interface **1424**. Communications interface **1424** allows software and data to be transferred between computer system **1402** and external devices. Examples of communications interface **1424** can include a modem, a network interface (such as an Ethernet card), a communications port, a PCMCIA slot and card, etc. Software and data transferred via communications interface **1424** are in the form of signals **1426** that can be electronic, electromagnetic, optical or other signals capable of being received by communications interface **1424**. Signals **1426** are provided to communications interface via a channel **1428**. Channel **1428** carries signals **1426** and can be implemented using wire or cable, fiber optics, a phone line, a cellular phone link, an RF link and other communications channels.

In this document, the terms "computer program medium" and "computer usable medium" are used to generally refer to media such as removable storage device **1418**, a hard disk installed in hard disk drive **1412**, and signals **1426**. These computer program products are means for providing software to computer system **1402**.

Computer programs (also called computer control logic) are stored in main memory **1408** and/or secondary memory **1410**. Computer programs can also be received via communications interface **1424**. Such computer programs, when executed, enable computer system **1402** to perform the features of the present invention as discussed herein. In particular, the computer programs, when executed, enable processor **1404** to perform the features of the present invention. Accordingly, such computer programs represent controllers of computer system **1402**.

In an embodiment where the invention is implemented using software, the software may be stored in a computer program product and loaded into computer system **1402** using removable storage drive **1414**, hard drive **1412** or communications interface

1424. The control logic (software), when executed by processor 1404, causes processor 1404 to perform the functions of the invention as described herein.

In another embodiment, the invention is implemented primarily in hardware using, for example, hardware components such as application specific integrated circuits (ASICs). Implementation of such a hardware state machine so as to perform the functions described herein will be apparent to persons skilled in the relevant art(s).

In yet another embodiment, the invention is implemented using a combination of both hardware and software.

SYSTEM OPERATION AND RESULTS

The operation and results of the present invention will now be described, using a data volume 240 that contains seismic data (data values representing seismic amplitudes). The user specifies the particular seismic data volume to be used, which is loaded from disk into main memory. A default 3D sampling probe is drawn. The user specifies the colors to be used for the seismic amplitudes. The degree of transparency can also be selected. The three probes shown in FIG. 15 are all opaque, with the intersection of the probes and the seismic data volume texture mapped onto the surfaces of the probes. One of the probes is displayed with the bounding geometry shown; the other two probes are displayed without the bounding geometry.

FIG. 15 shows three active probes. The user has selected not to display the data contained in the background planes and in the remainder of the seismic data volume outside of the active probes. Two of the probes shown in FIG. 15 intersect each other, and the intersection of the two probes is displayed. In this manner, the user can more readily visualize and interpret geologic features inherent in the seismic data volume. For example, a geologic feature, represented by a dark band between two light bands, extends across the face of the larger intersecting probe and "turns the corner" to extend onto the face of the smaller intersecting probe perpendicular to it. The ability to move and intersect the probes with each other, and throughout the seismic data volume, enables a user to better interpret and track the extent of such a geologic feature.

FIG. 16 illustrates how one probe can be used to "cut" another probe to create a "hole" in a probe. As with FIG. 15, the user has selected not to display the data contained

in the background planes and in the remainder of the seismic data volume outside of the active probes. FIG. 16 illustrates that the opacity settings can be individually selected by the user for each active probe. One of the probes shown in FIG. 16 is opaque, so that it is not possible to see through the surfaces of this probe. In order to see internal to this outer probe, it must be cut away by another probe. The outer opaque probe is referred to as a "data probe". A second completely transparent "cut probe" has been used to cut out a 3D sub-section of the data probe. Because the cut probe is completely transparent, it is not visible in FIG. 16. However, the fact that the completely transparent cut probe is present is evidenced by the fact that the opaque internal surfaces of the data probe are visible. The image of the intersection of the data probe and the cut probe is the intersecting surface internal to the data probe.

A third active probe is shown in FIG. 16. The third probe is displayed with the bounding geometry shown. The third probe is volume rendered with varying degrees of transparency so that the user can see through the outer surfaces of the probe and view geologic features within the third probe. As shown in FIG. 16, the third probe is volume rendered partially within the 3D sub-section of the data probe that has been cut away by the cut probe.

The third volume-rendered probe shown in FIG. 16 also contains selected points that have been selected through a seed picking process (function 470). The selected points have been imaged in a manner to highlight them for the user. The selected points are shown in FIG. 16 as connecting points. The seed point is illustrated in FIG. 16 by the darker sphere.

FIG. 17 illustrates one embodiment of a ribbon section 1710 in accord with the present invention. Like the probe, ribbon sections are a 3-D volume visualization method for displaying data along user-defined traverses through a 3-D volume data set within a probe. The traverses cut through the 3-D volume data set somewhat like a cookie cutter through dough and therefore are referred to herein as cookie planes such as cookie planes 1712 and 1714. Ribbon sections may display the 3-D data in orientations that do not necessarily conform to the orientation of the ordinate axis of the 3-D volume data set and/or probe. Ribbon section 1710 is produced by the user in accord with the process described herein below. The traverses or cookie planes are defined by digitizing control

points such as control points **1716**, **1718**, and **1720**, which may be selected from a face of the probe referred to as the "probe face plane." The user may create a transparent cut probe as described above to interface with an opaque ribbon section. Alternatively, the probe can be made opaque and the ribbon section can be made transparent if desired.

5 The control points may be used to produce a plurality of line segments such as line segments **1722**, **1724**, and **1726**, which collectively are referred to as polyline **1728** which is like a polygon but may or may not be closed. Therefore, the line segments may form an open or closed line so that a single or multiple cookie planes may be produced. In a preferred embodiment, the area of data display, i.e. the cookie planes, is projected
10 along a direction perpendicular to the probe face plane and the data displayed may extend to an opposing face of the probe referred to as the "opposing probe face plane." After creating a ribbon section, the user may use the mouse controls or keyboard to select, move, drag, or grab the control points to edit the ribbon section **1710** in real time and display different data from the 3D volume data set along the cookie planes **1712** and
15 **1714**. In addition to editing the ribbon section **1710** to view different data from the 3D volume data set within the probe, the entire ribbon section **1710** and probe may be simultaneously moved to a different position in order to view different data from the 3D volume data set outside the boundaries of the probe at its prior position. Active control point **1720** is preferably high-lighted or colored differently as compared to the other
20 control points to indicate control point **1720** is in an active state for operations such as moving; deleting, or otherwise editing as discussed further below. Control points may be inserted or deleted after the initial ribbon section construction. The ribbon section geometry and orientation may also be saved for future work sessions.

FIG. 18 depicts a block diagram of system **1810** for program modules in a
25 presently preferred embodiment of the invention for producing ribbon sections at real time frame rates as discussed herein above. Probe module **1822** provides initial context for sketching polyline **1728**. Probe module **1822** supplies user activity data such as mouse clicks or keystrokes to cookie manager **1824**. Thus, user activity data such as creation of control points, deletion of control points, moving of control points, moving
30 of the entire probe, and the like are inserted into system **1810**.

Cookie manager **1824** manages the user input data supplied by probe **1822**. Cookie manager **1824** distributes the data, e.g. control points add, move, and delete as appropriate to both polyline module **1826** and cookie plane module **1828**. For some types of data, such as inserting a control point, cookie manager **1824** receives data from
5 polyline module **1826** and passes the data to cookie plane module **1828**.

Polyline module **1826** manages data related to polyline **1728** and the associated control points in conjunction with polymarker module **1832** and polystate module **1830**. Polyline **1728** is mainly provided for visual reference. Polyline module **1826** in conjunction with polystate module **1830** manages the state of the control points. For
10 instance, in the active state, a control point can be moved or deleted. The active control point, such as active control point **1720** is preferably highlighted. The control points may be enlarged or decreased in size for easier viewing. Polymarker module **1832** provides visual context such as highlighting or varied colors, for the control points so that an operator knows which point is in the active state for moving, deleting, and otherwise
15 editing. Polymarker module **1832** also may provide text such as the location indication adjacent active control point **1720**.

Cookie plane module **1828** provides textured geometry, which may for instance be lithography-related for geological data, to the surface of the cookie planes such as cookie planes **1712** and **1714**. Cookie state module **1834** monitors the state of the cookie planes
20 so that in the active state one or more cookie planes can be moved or otherwise edited whereas in the inactive state no changes are made.

During operation of system **1810**, probe module **1822** may notify cookie manager **1824** that an event has taken place, e.g., a marker deletion, i.e., a control point deletion. Cookie manager **1824** then notifies polyline module **1826** which deletes the marker or
25 control point and joins up the two surrounding lines into one line and notifies the polymarker module to remove the deleted marker from the list of polymarkers maintained by polymarker module **1832**. Cookie manager **1824** and cookie plane module then convert the two planes into one.

FIG. 19 illustrates one embodiment of the invention for creating a three
30 dimensional surface representative of a physical phenomena described by a 3D volume data set such as, for example, a geological fault surface. In fact, this method has been

found to easily and quickly provide 3D volume visualization for rapid identification and interpretation of geological fault surfaces. However, other types of surfaces for other types of data could also be quickly described from use of the method of the present invention. Although the method is described in more detail below, in general the method is used to digitize control points, such as control points **1902**, **1904**, **1906**, and **1908** along a probe face **1910**. Visual examination of the textured surface of probe face **1910** permits an operator to visually locate control points on a structure of interest such as a suspected fault line. Probe face **1910** is then moved, and a new set of control points are digitized. Surface **1912** is then interpolated between the initial points and the new control points. The control points may be easily edited or moved to more accurately define the surface may be **1912** at a real time frame rate as discussed above. This process can be repeated until the surface interpretation is complete, at which time the surface **1912** can be saved.

Thus, one embodiment of the invention disclosed by FIG. 19 provides a method of rapidly constructing a three-dimensional surface or fault found within a 3-D volume data set. In a preferred embodiment, 3-D probes, as discussed above, are used. The method involves constructing a plurality of spline curves, such as spline curve **1914** on the probe face **1910** which may be interactively constructed when visualizing the data displayed on probe face **1910**. Spline curve **1914** is interpolated using an algorithm created in the same way as spline curves **1916**, **1918**, and **1920** are interpolated. Spline curves and v-curves **1922**, **1924**, and **1926**, are produced to form a grid. The grid outlines the three dimensional surface **1912**.

For construction of the initial spline curve, such as for instance spline curve **1914**, the user digitizes control points, such as control points **1902**, **1904**, **1906** and **1908** on the probe face **1910**. Markers are produced at these control points and spline curve **1914** is interpolated between the control points **1902**, **1904**, **1906** and **1908**. Control points **1902**, **1904**, **1906** and **1908** may be moved within probe face **1910**, thereby interpolating a new spline curve **1914**. Once the probe face **1910** is selected, the other probe surfaces are made transparent for ease of operation. Additionally, the selected probe face **1910** may be made opaque in order to view surface **1912** through the probe face **1910**.

The user then moves the probe face to **1910** to another position and selects new control points. The user may easily move back and forth between previously created

spline curves by selecting grid intersections such as intersection **1928** or **1930**. As additional spline curves are created, the v-curves may also be smoothly and quickly interpolated using another algorithm. The user preferably creates a plurality of spline curves in the same manner, and interpolation of surface **1912** is immediately displayed at real time frame rates as discussed here above.

The user may stop the probe and move one or more control points, such as control points **1902**, **1904**, **1906** and **1908** to adjust the position of the respective spline curve such as spline curve **1914**. All other spline curve, such as spline curves **1916**, **1918**, and **1920** remain the same while surface **1912** is smoothly interpolated between the current spline curve **1914** on the probe face **1910** and the prior spline curve **1920**. The remainder of the surface **1912** remains the same unless the user moves the probe face **1910** to another spline curve such as **1920** and proceeds to edit the same thereby reshaping the surface **1912** between the current spline curve **1920** on the probe face place **1910** and the prior spline curve **1918**.

Additional spline curves may be added between existing spline curves if desired. By selecting grid intersections such as grid intersections **1928** or **1930**, or by selecting control points on the probe face, such as control points **1902**, **1904**, **1906** and **1908**, the user may quickly move the probe face **1910** back and forth as desired. Once a grid intersection is selected, the user may move the respective control points within the probe face **1910** that will be displayed as indicated in FIG. 19, and surface **1912** with its spline curves and v-curves will follow interactively. The spline curves and the v-curves may or may not be displayed depending on preference of the user. Preferably, only one probe face **1910** is displayed at a time for clarity.

FIG. 20 discloses modular system **2000** which describes the software for performing the functions as described in connection with FIG. 19. In one embodiment, modular system **2000** incorporates many of the same modules as used in modular system **1810** for producing a ribbon section. Thus, the design may permit a more general control that may effectively perform both ribbon section functions as well as surface mapping functions. For instance, cookie module **2018**, polymarker module **2012**, and polyline module **2014** may be used in the manner discussed above relating to producing ribbon sections. Likewise, probe module **2010** therefore again performs the functions as

previously noted such as providing initial sketching splines such as spline **1914**, which will also be observed to be similar to the polylines discussed hereinbefore. Probe module **2010** supplies user activity data such as mouse clicks and keystrokes to the various other modules. Cubic spline module **2016** relates to controlling functions for the editable surface or mapping feature such as surface **1912** shown in FIG. 19. Cubic spline module **2016**, spline manager module **2020**, spline curve module **2022**, and spline surface module **2024** are functions that are different from those used only in creating ribbon sections. Spline manager **2020** performs a number of different functions such as creating or deleting surfaces, changing mode functions from creating a surface to editing a surface, as well as read and write functions. For instance, spline manager **2020** may read and write to a surface attribute file regarding attributes such as colors, showing the grid, marker colors, and the like. Spline curve module **2022** keeps track of the spline curves, keeps track of which spline curve may be in the editing or creating state and keeps track of changes made to the spline curves. Spline surface module **2024** acts on the changes made for interpolating the resulting surface changes.

By using the system and method of the present invention, geologists and geophysicists can more quickly and accurately visualize and interpret 3D seismic data. This sharply reduces 3D seismic project cycle time, boosts production from existing fields, and finds more reserves.

20

CONCLUSION

While various embodiments of the present invention have been described above, it should be understood that they have been presented by way of example only, and not limitation. Thus, the breadth and scope of the present invention should not be limited by any of the above-described exemplary embodiments, and should be defined in accordance with the spirit of the invention including the following claims and their equivalents.

25

5. The method of Claim 2, wherein said step of editing further comprises:
adding one or more control points to said plurality of control points.

5 6. The method of Claim 1, wherein said ribbon section is perpendicular to
said probe face plane.

7. The method of Claim 1, wherein said ribbon section extends from said
probe face plane to said opposing probe face plane.

10

8. The method of Claim 1, wherein said one or more lines comprise a
plurality of straight lines.

9. The method of Claim 1, wherein said one or more lines form a closed line.

15

10. The method of Claim 1, wherein said ribbon section is comprised of a
plurality of planes.

11. The method of Claim 1, wherein said three-dimensional probe has a
plurality of side faces perpendicular to said probe face plane, said ribbon section being
unparallel with respect to each of said plurality of side faces.

20

12. A program storage device readable by a machine, embodying a program
of instructions executable by machine to perform method steps for imaging a three-
dimensional data volume, said three-dimensional data volume comprising a plurality of
voxels, each voxel comprising a three-dimensional location and a dataword, said
dataword being representative of a physical phenomena, said method comprising;

25

displaying a plane within said three-dimensional data volume;

producing a plurality of control points in said plane, said plurality of
control points defining one or more lines on said plane;

30

extending a ribbon section from said plane, one edge of said ribbon section being formed by said one or more lines; and

selectively imaging said datawords representative of said physical phenomena at three-dimensional locations which intersect said ribbon section and said three-dimensional data volume.

13. The method of Claim 12, further comprising:
editing said plurality of control points in said plane to thereby redefine
said one or more lines, and

extending another redefined ribbon section from said plane toward an opposing plane.

14. The method of Claim 13, wherein said step of editing further comprises:
deleting one or more of said plurality of control points.

15. The method of Claim 13, wherein said step of editing further comprises:
changing a location of one or more of said plurality of control points.

16. The method of Claim 13, wherein said step of editing further comprises:
adding one or more control points to said plurality of control points.

17. The method of Claim 12, wherein said ribbon section is perpendicular to said plane.

18. The method of Claim 12, wherein said ribbon section extends from said plane to an opposing plane.

19. The method of Claim 12, wherein said one or more lines comprise a plurality of straight lines.

20. The method of Claim 12, wherein said one or more lines form a closed line.

5 21. The method of Claim 12, wherein said ribbon section is comprised of a plurality of planes.

22. The method of Claim 12, wherein said plane is a probe face plane of a three-dimensional probe which has a plurality of side faces perpendicular to said probe face plane, said ribbon section being oriented so as not to be parallel to at least one of
10 said plurality of side faces.

23. A method for imaging a three-dimensional data volume, said three-dimensional data volume comprising a plurality of voxels, each voxel comprising a three-dimensional location and a dataword, said method comprising:

15 positioning a face of a probe at a first position within said three-dimensional data volume;

forming a first set of control points on said face of said probe for tracking a physical phenomena described by said three-dimensional data volume, said first set of control points defining a first spline curve;

20 moving said face of said probe to a second position within said three-dimensional volume;

forming a second set of control points on said face of said probe for tracking said physical phenomena, said second set of control points defining a second spline curve; and

25 interpolating between said first spline curve and said second spline curve to define a three-dimensional surface representative of said physical phenomena.

24. The method of Claim 23, further comprising:

displaying the surface representative of said physical phenomena, said surface intersecting said first set of control points and said second set of control points.

5

25. The method of Claim 23, further comprising:

interpolating between said first set of control points to define said first spline curve and interpolating between said second set of control points to define said second spline curve, at least one of said first spline curve and said second spline curve being curvilinear.

10

26. The method of Claim 23, further comprising:

moving said face of said probe to a third position within said three-dimensional volume;

15

forming a third set of control points on said face of said probe for tracking said physical phenomena, said third set of control points defining a third spline curve; and

interpolating between said first spline curve, said second spline curve, and said third spline curve for enlarging said surface.

20

27. The method of Claim 23, further comprising:

editing at least one of said first set of control points and said second set of control points.

25

28. The method of Claim 23, further comprising:

forming a plurality of v-curves which interconnect between respective control points at said first position of said probe and said second position of said probe.

34. A program storage device readable by a machine, embodying a program of instructions executable by machine to perform method steps for imaging a three-dimensional data volume, said three-dimensional data volume comprising a plurality of voxels, each voxel comprising a three-dimensional location and a dataword, said method comprising:

5 positioning a plane at a plurality of plane positions within said three-dimensional data volume;
forming a set of control points at each of said plurality of plane positions such that each of said set of control points defines a related spline curve; and
10 interpolating between each of said spline curves to form a surface representative of a physical phenomena described by said three-dimensional data volume.

35. The method of Claim 34, further comprising:
15 displaying said surface representative of said physical phenomena, said surface intersecting each of said set of control points.

36. The method of Claim 34, further comprising:
interpolating between each of said set of control points to define said
20 related spline curves, at least one of said related spline curves being curvilinear.

37. The method of Claim 34, further comprising:
editing one or more of said control points.

38. The method of Claim 34, further comprising:
forming a plurality of v-curves which interconnect between respective
25 control points at said plurality of plane positions.

39. The method of Claim 38, further comprising:

displaying said spline curves and said v-curves to form a grid representative of said physical phenomena, said grid having a plurality of intersections between said spline curves and said v-curves.

5

40. The method of Claim 39, further comprising:

selecting one of said plurality of intersections, and moving said intersection to thereby edit said grid.

10

41. The method of Claim 39, further comprising:

selecting one of said plurality of intersections to thereby reposition said plane to pass through said intersection.

42. The method of Claim 39, further comprising:

15

selecting one of said sets of control points to thereby reposition said plane to pass through said one of said sets of control points.

43. The method of Claim 34, further comprising:

20

forming another set of control points at each of said plurality of plane positions, such that each of said another set of control points defines another related spline curve; and

25

interpolating between each of said another spline curves to form another surface representative of another physical phenomena described by said three-dimensional data volume, said surface and said another surface being formed substantially at the same time.

09036612.120.1701

00936, 682

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
10 May 2002 (10.05.2002)

PCT

(10) International Publication Number
WO 02/37422 A1

(51) International Patent Classification⁷: **G06T 15/00**

ACOSTA, Mark [US/US], 2777 Woodland Park Drive
#154, Houston, TX 77082 (US).

(21) International Application Number: PCT/US00/29835

(74) **Agent: JENSEN, William, P.**; Shook Hardy and Bacon
L.L.P., Suite 1600, 600 Travis Street. Houston, TX 77002-
2911 (US).

(22) International Filing Date: 30 October 2000 (30.10.2000)

(25) Filing Language: English

(81) **Designated States (national)**: AE, AG, AL, AM, AT, AU,
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CR, CU, CZ,
DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR,
HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR,
LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ,
NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM,
TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW

(26) Publication Language: English

(71) **Applicant (for all designated States except US): MAGIC
EARTH L.L.C.** [US/US], Suite 750, 2000 West Sam
Houston Parkway, Houston, TX 77042 (US)


(72) **Inventors; and**

(75) **Inventors/Applicants (for US only): CHEUNG, Yin**
[US/US]; 5906 Bayberry Way, Sugar Land, TX 77479
(US). **LEES, Jack** [US/US], 6403 Edloc, Houston, TX
77005 (US) **SEMBROSKI, Charles** [US/US], 5307
Summerside, Katy, TX 77450 (US). **ZEITLIN, Michael**
[US/US]; 12506 Old Oaks, Houston, TX 77024 (US)

(84) **Designated States (regional)**: ARIPO patent (GH, GM,
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian
patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European
patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE,
IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG,
CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) **Title:** SYSTEM AND METHOD FOR ANALYZING AND IMAGING THREE-DIMENSIONAL VOLUME DATA SETS

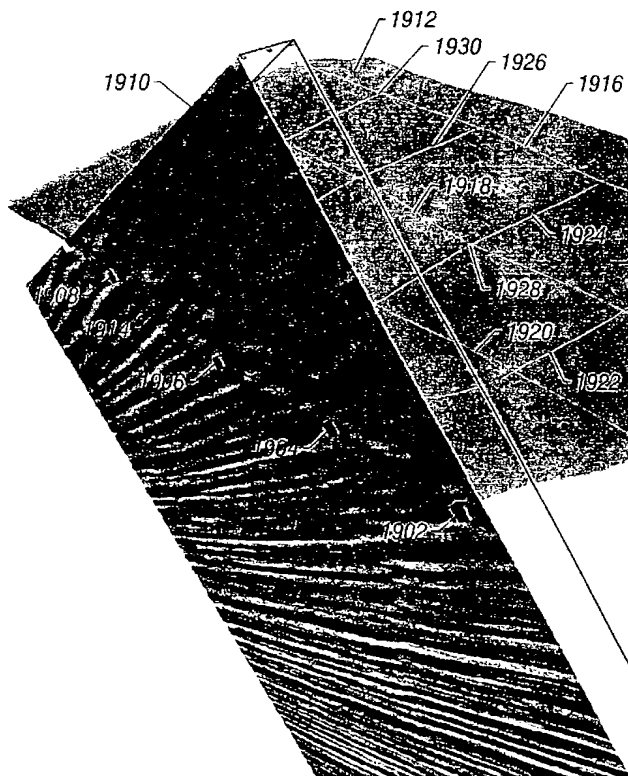

(57) **Abstract:** A system and method is provided
for quickly tracking a physical phenomena
represented within the three-dimensional volume
data set. A plurality of planes may be successively
displayed in the three-dimensional volume data
set from which points are digitized related to the
structure of interest to create a spline curve on
each plane. The area between the spline curves
(1914, 1916, 1918, 1920) is interpolated to produce
a surface (1912) representative of the structure of
interest, which may for example be a fault plane
described by the three-dimensional volume data
set. In this manner, the user can more easily and
effectively visualize and interpret the features
and physical parameters that are inherent in the
three-dimensional volume data set.

WO 02/37422 A1

1/17

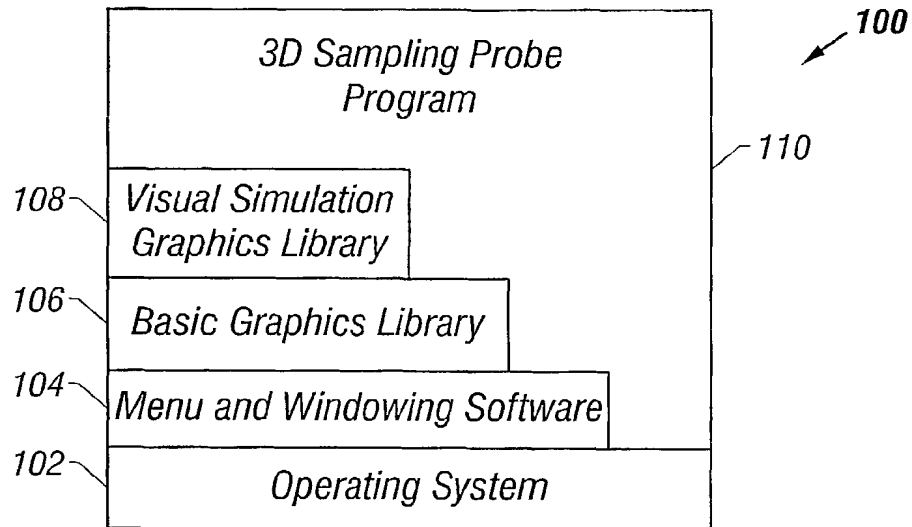


FIG. 1


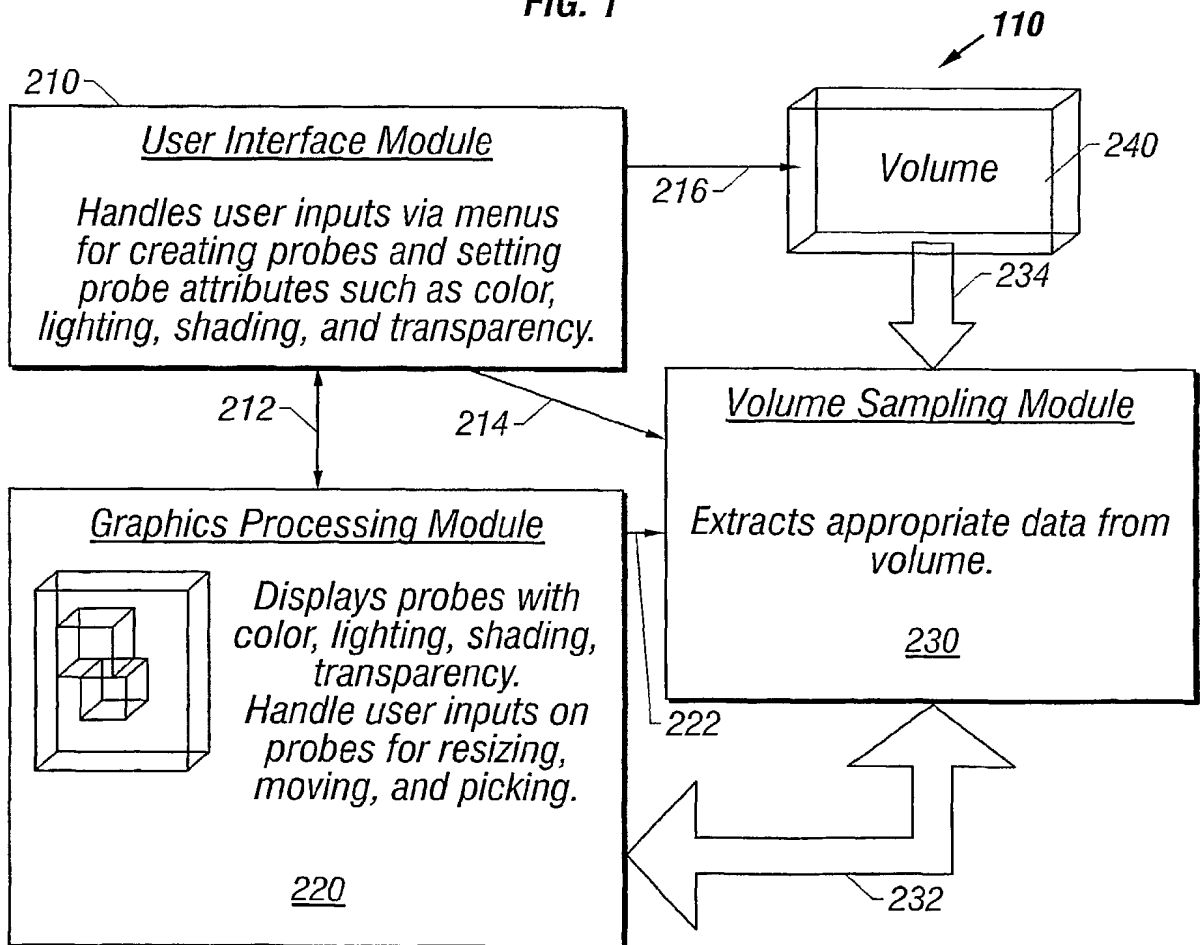


FIG. 2

09/936682

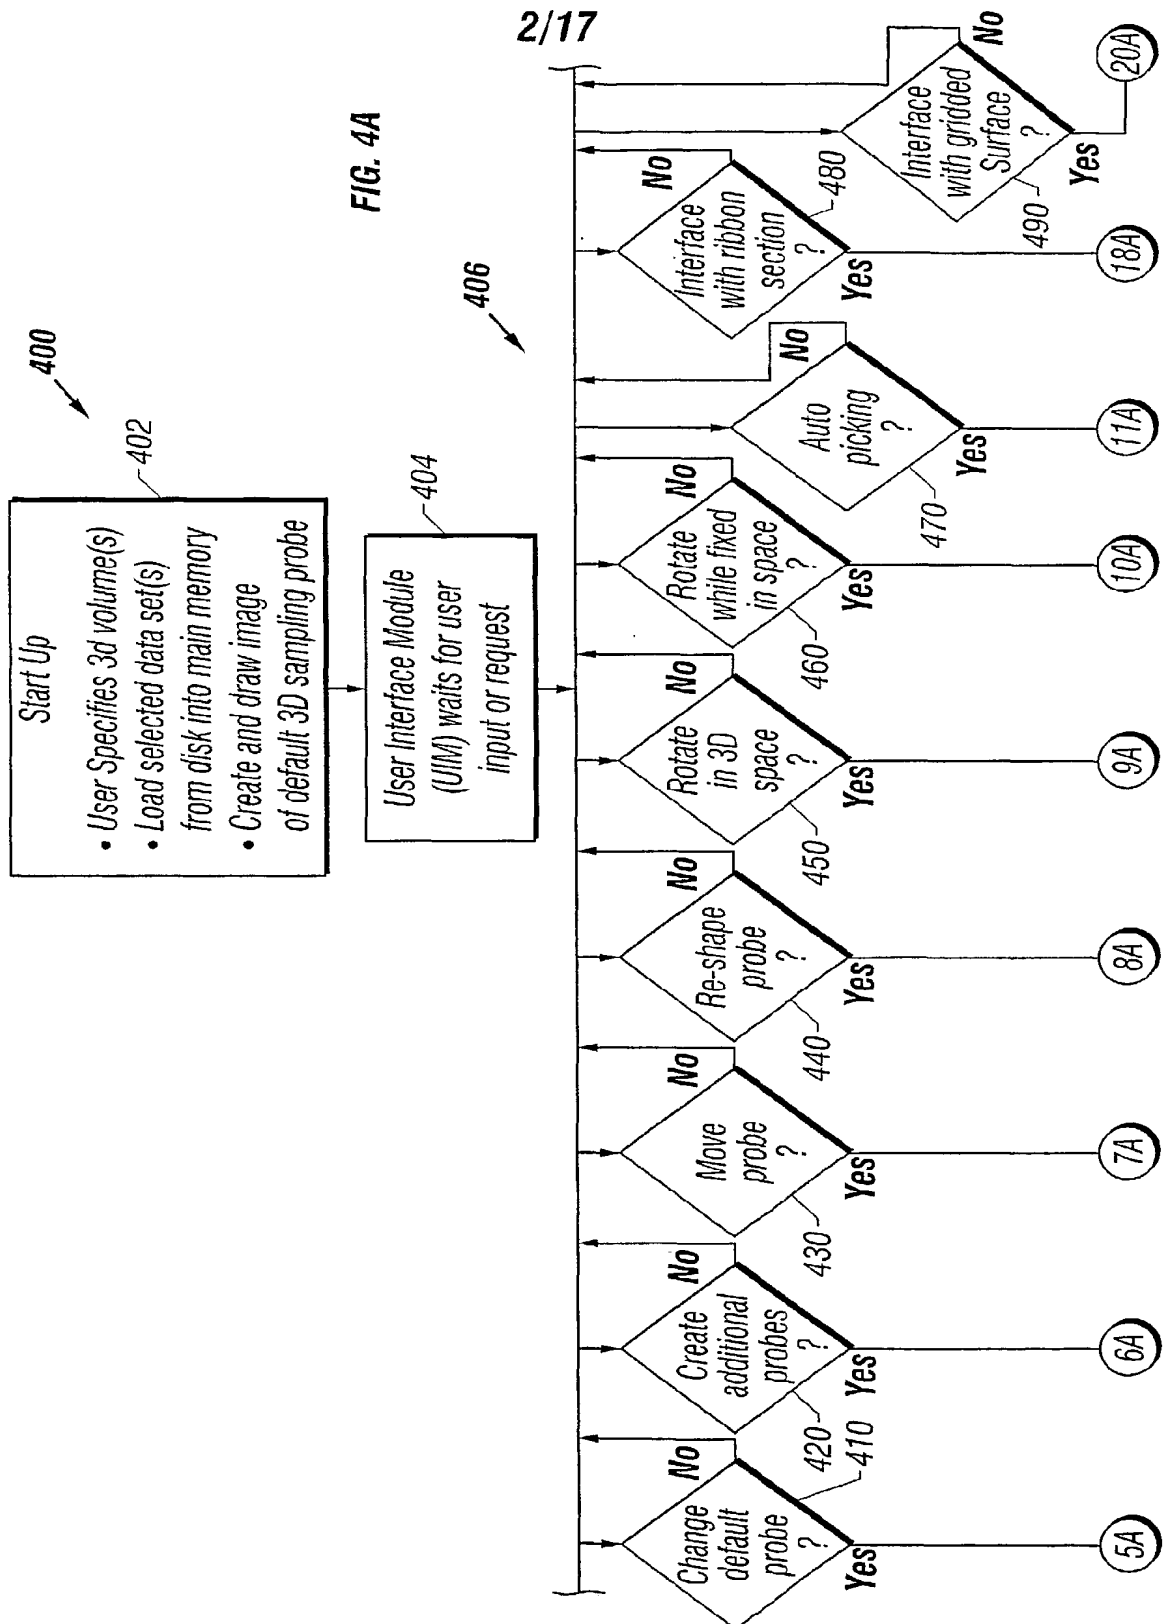

3/17

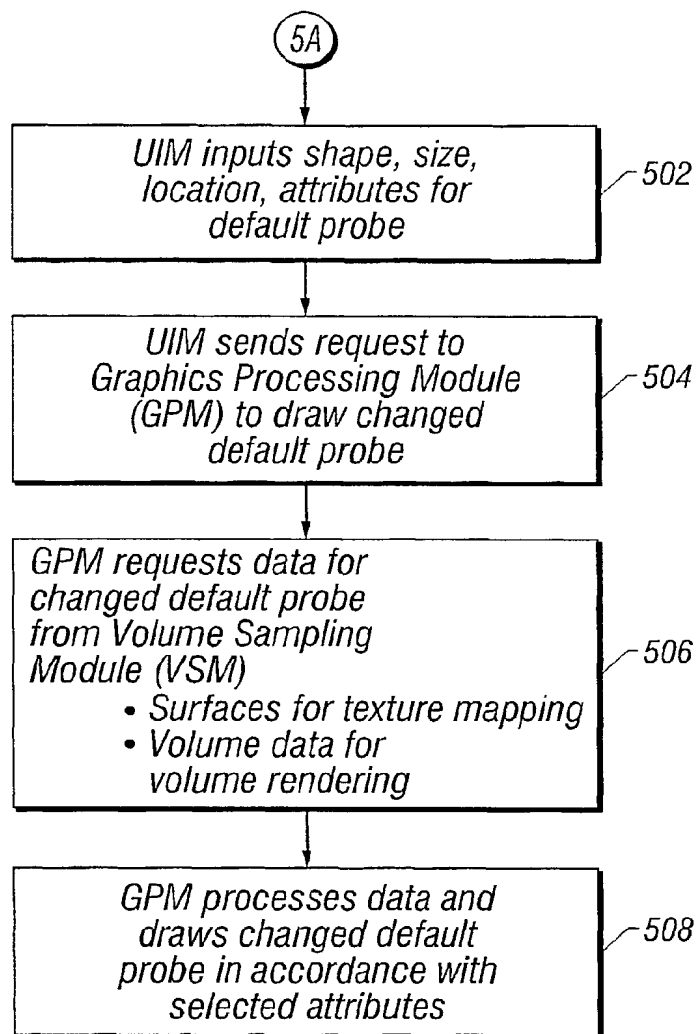


FIG. 5

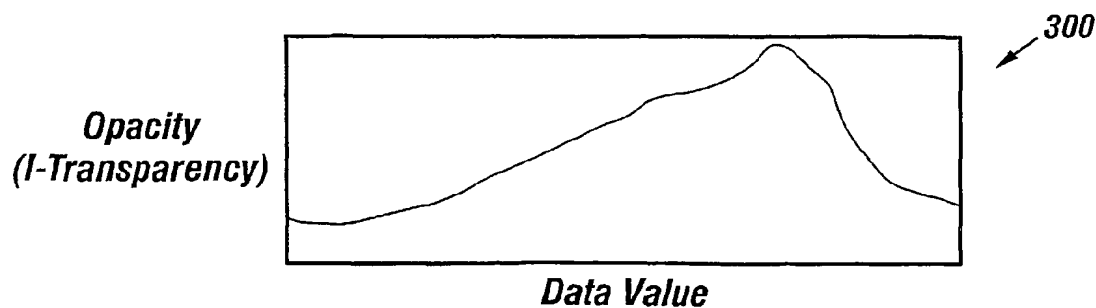


FIG. 3

4/17

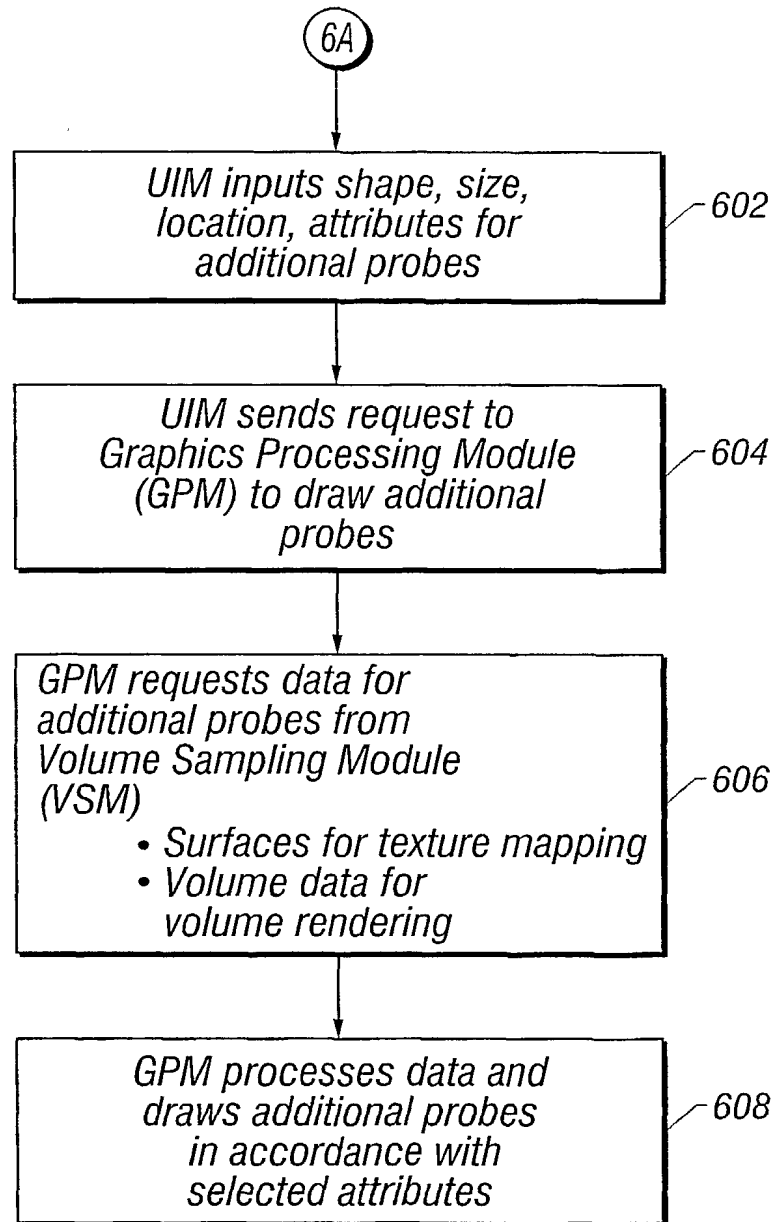


FIG. 6

5/17

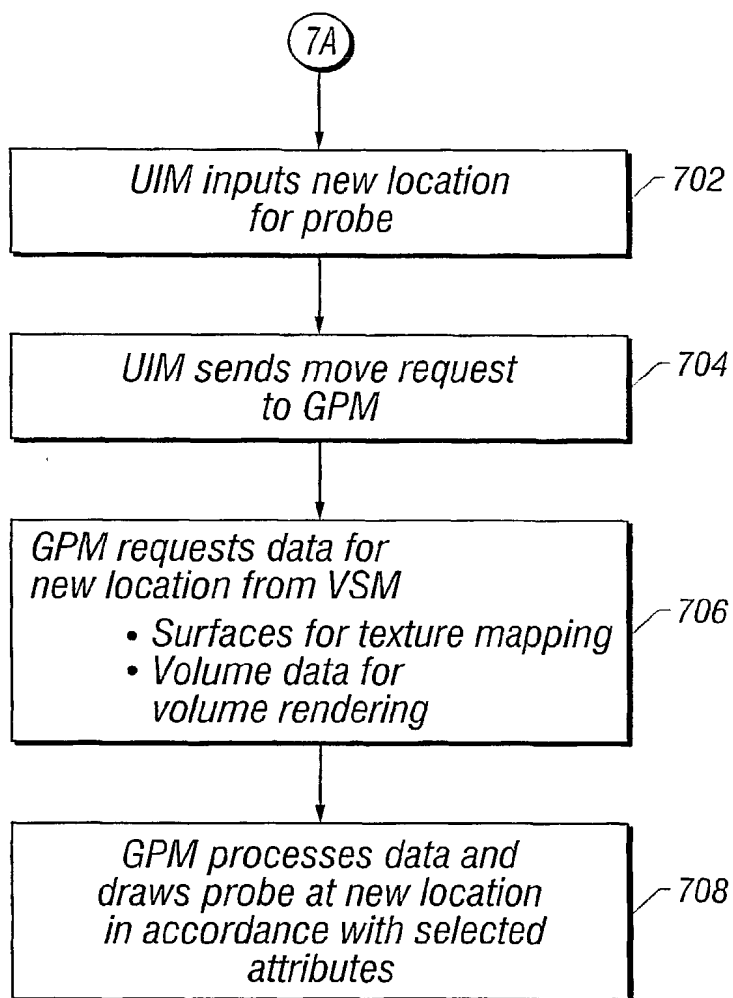


FIG. 7

6/17

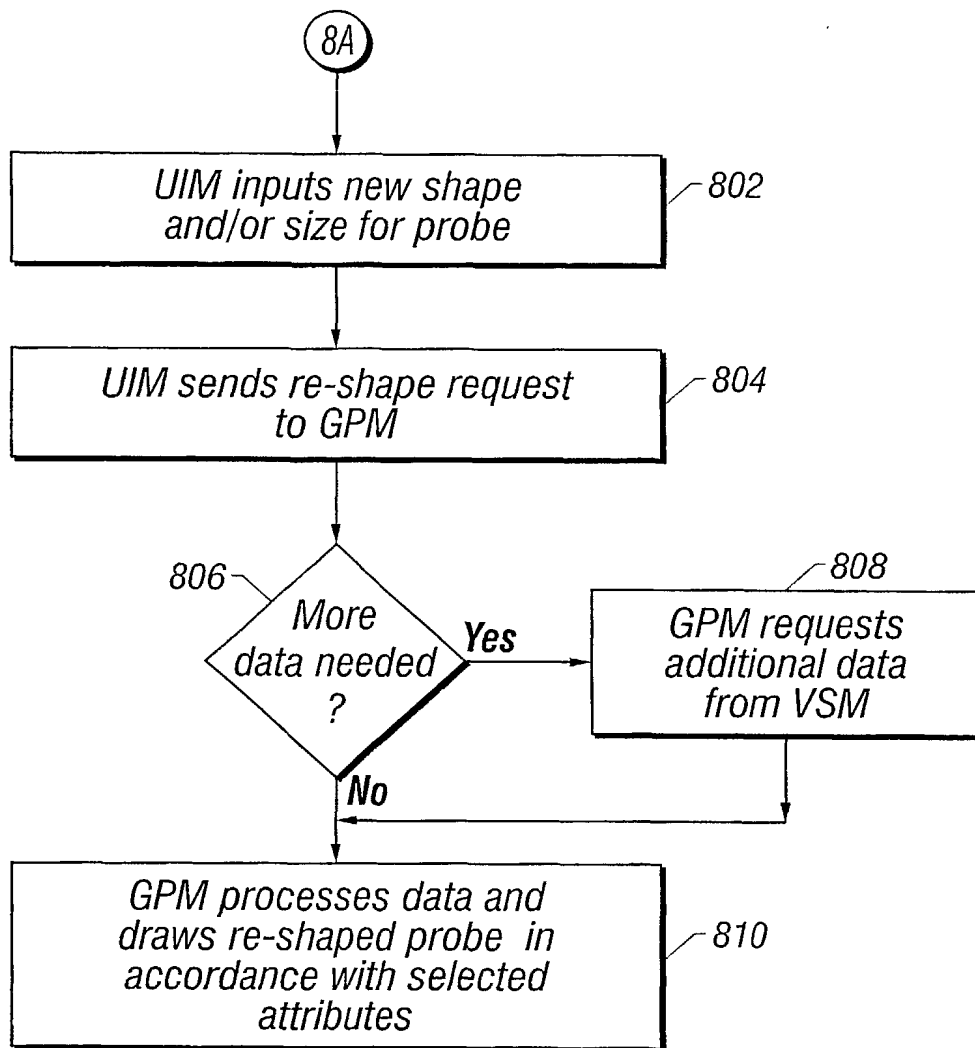


FIG. 8

7/17

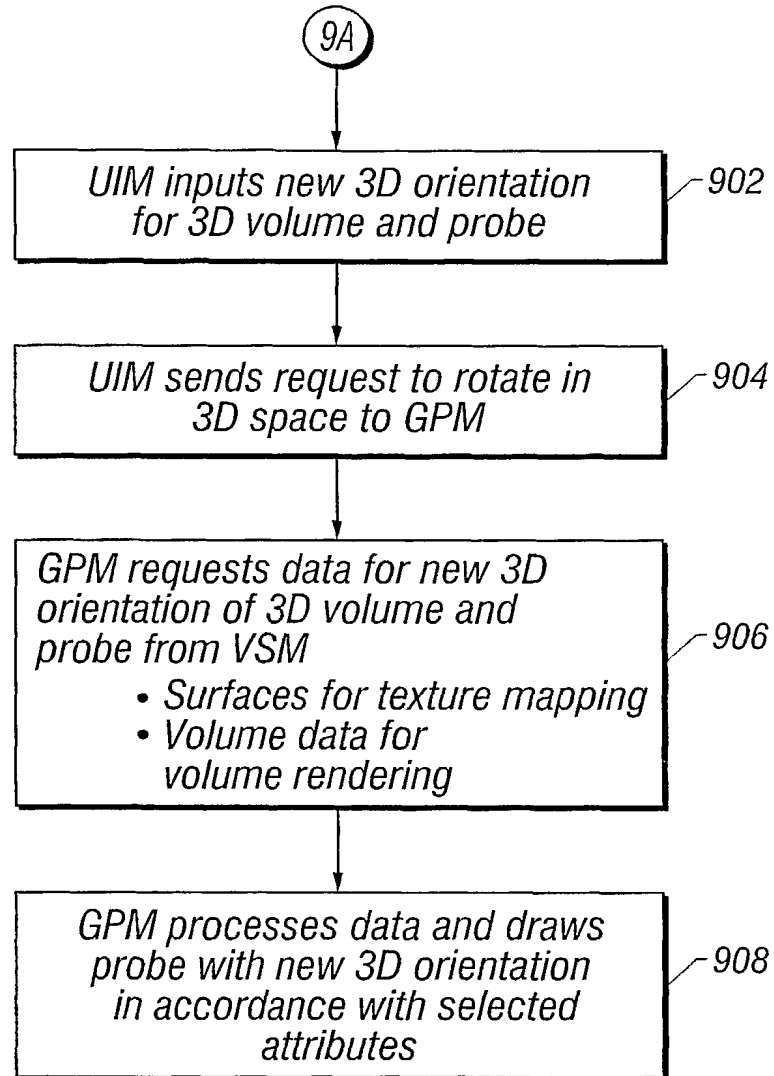


FIG. 9

8/17

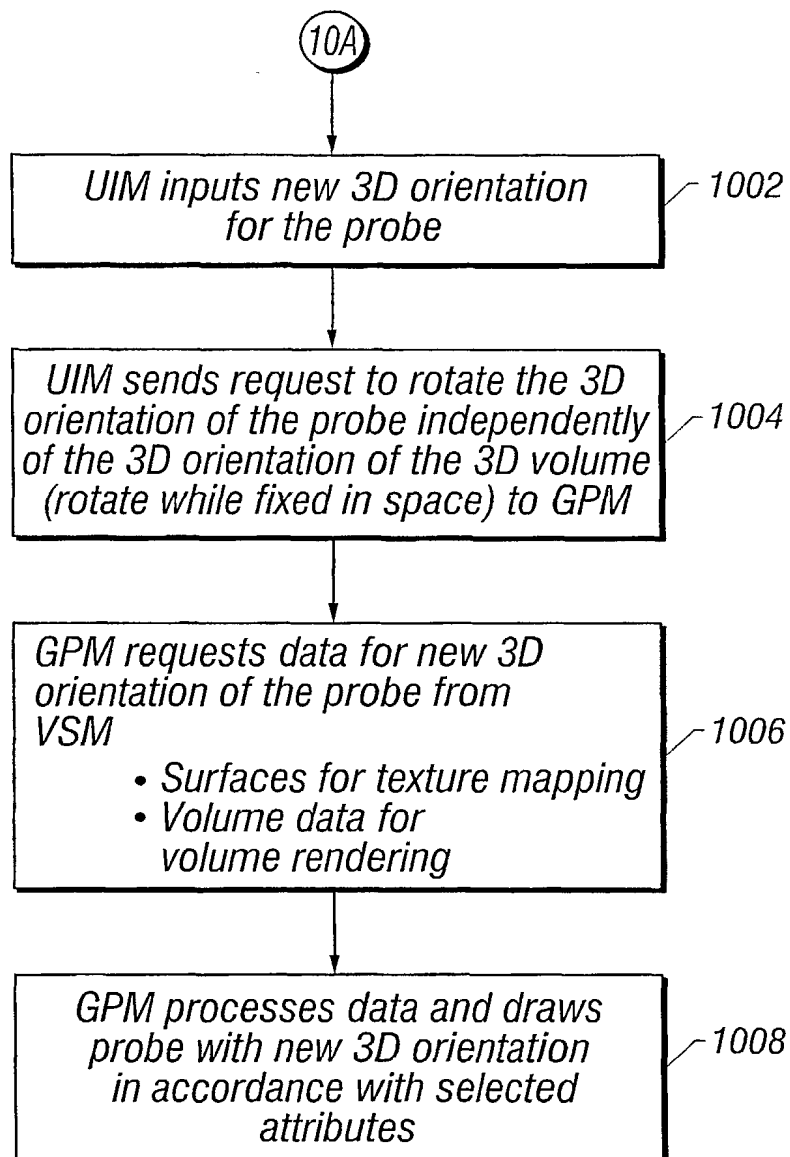


FIG. 10

9/17

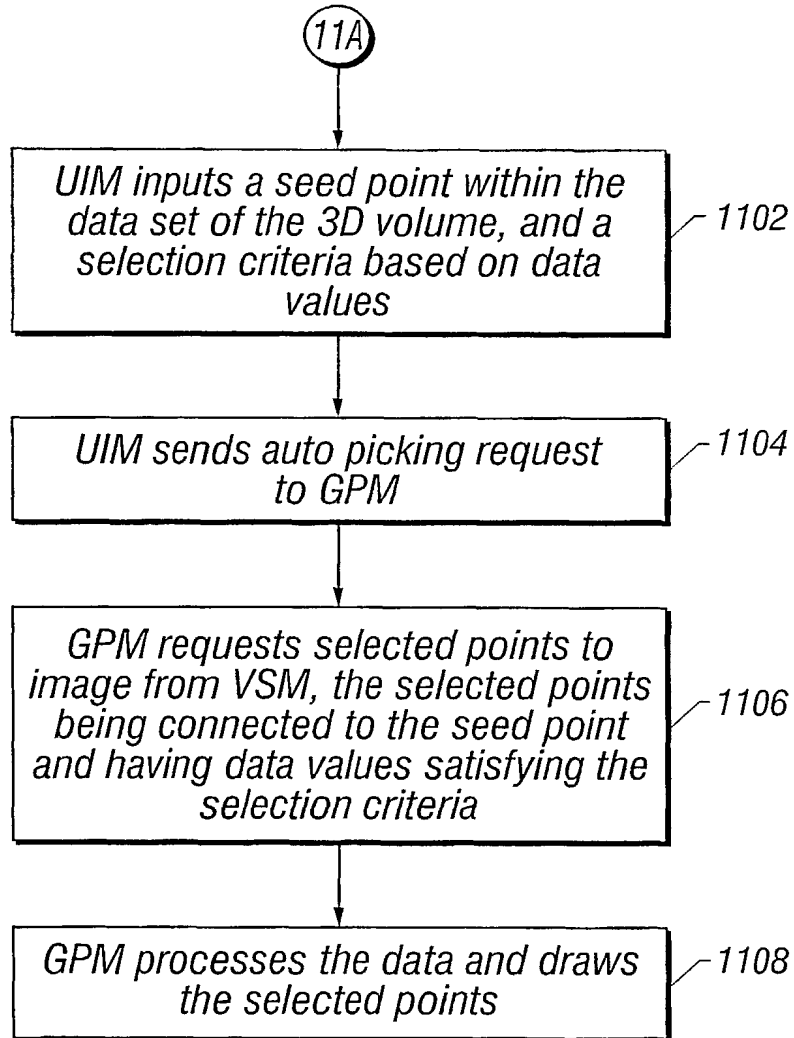


FIG. 11

10/17

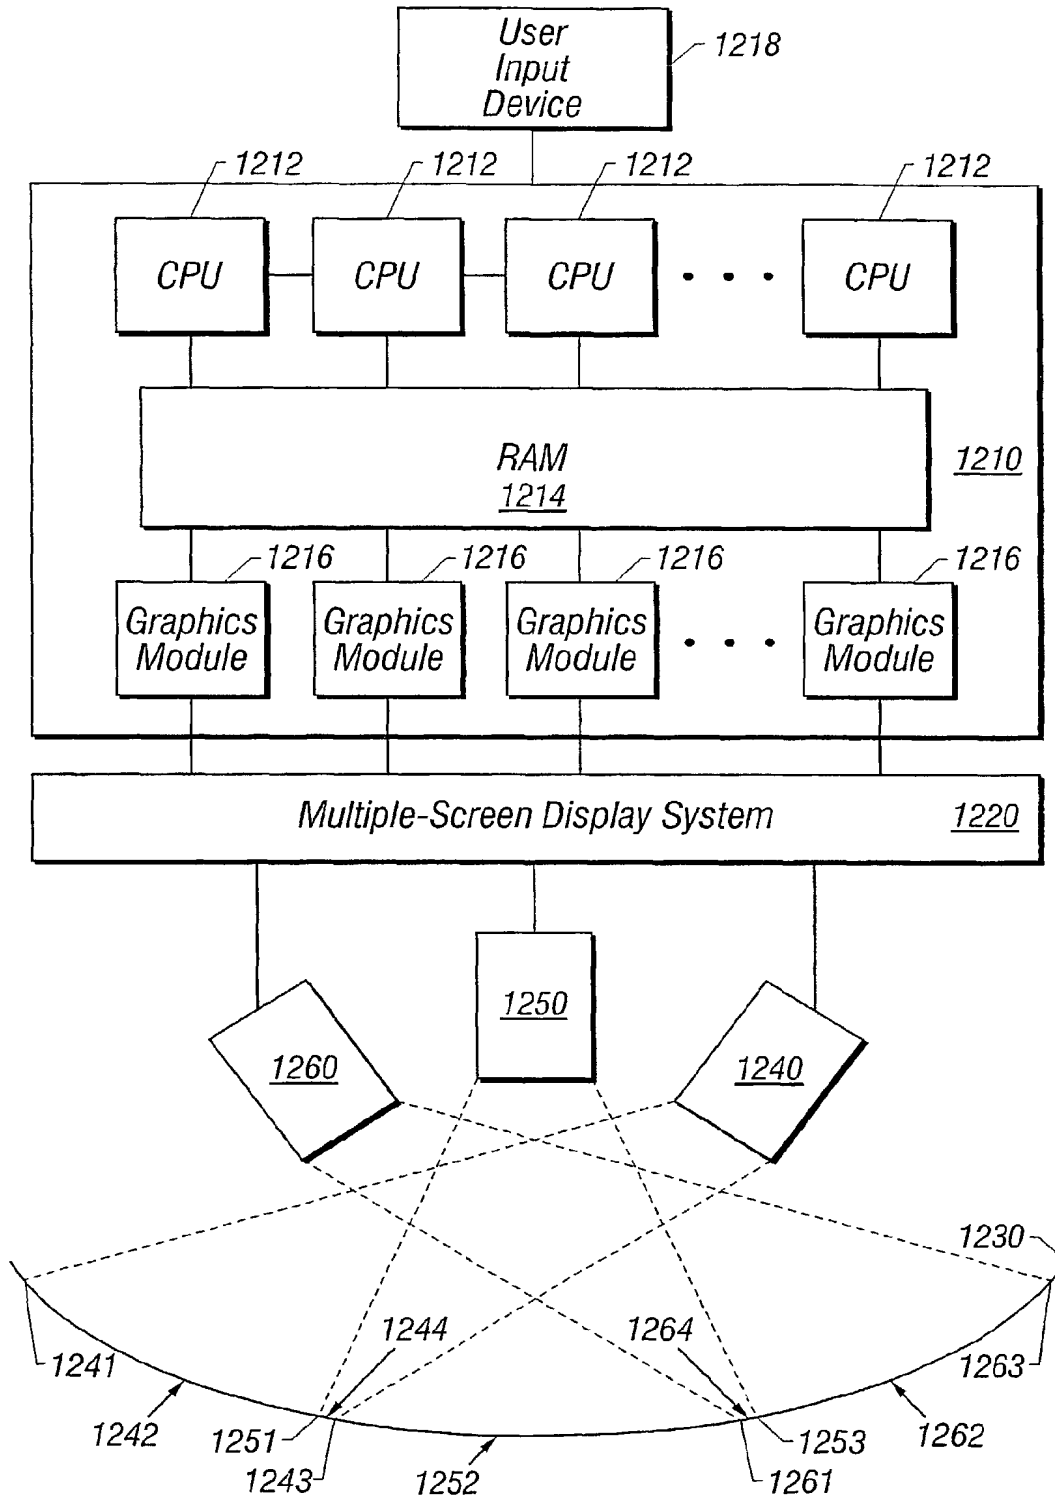


FIG. 12

11/17

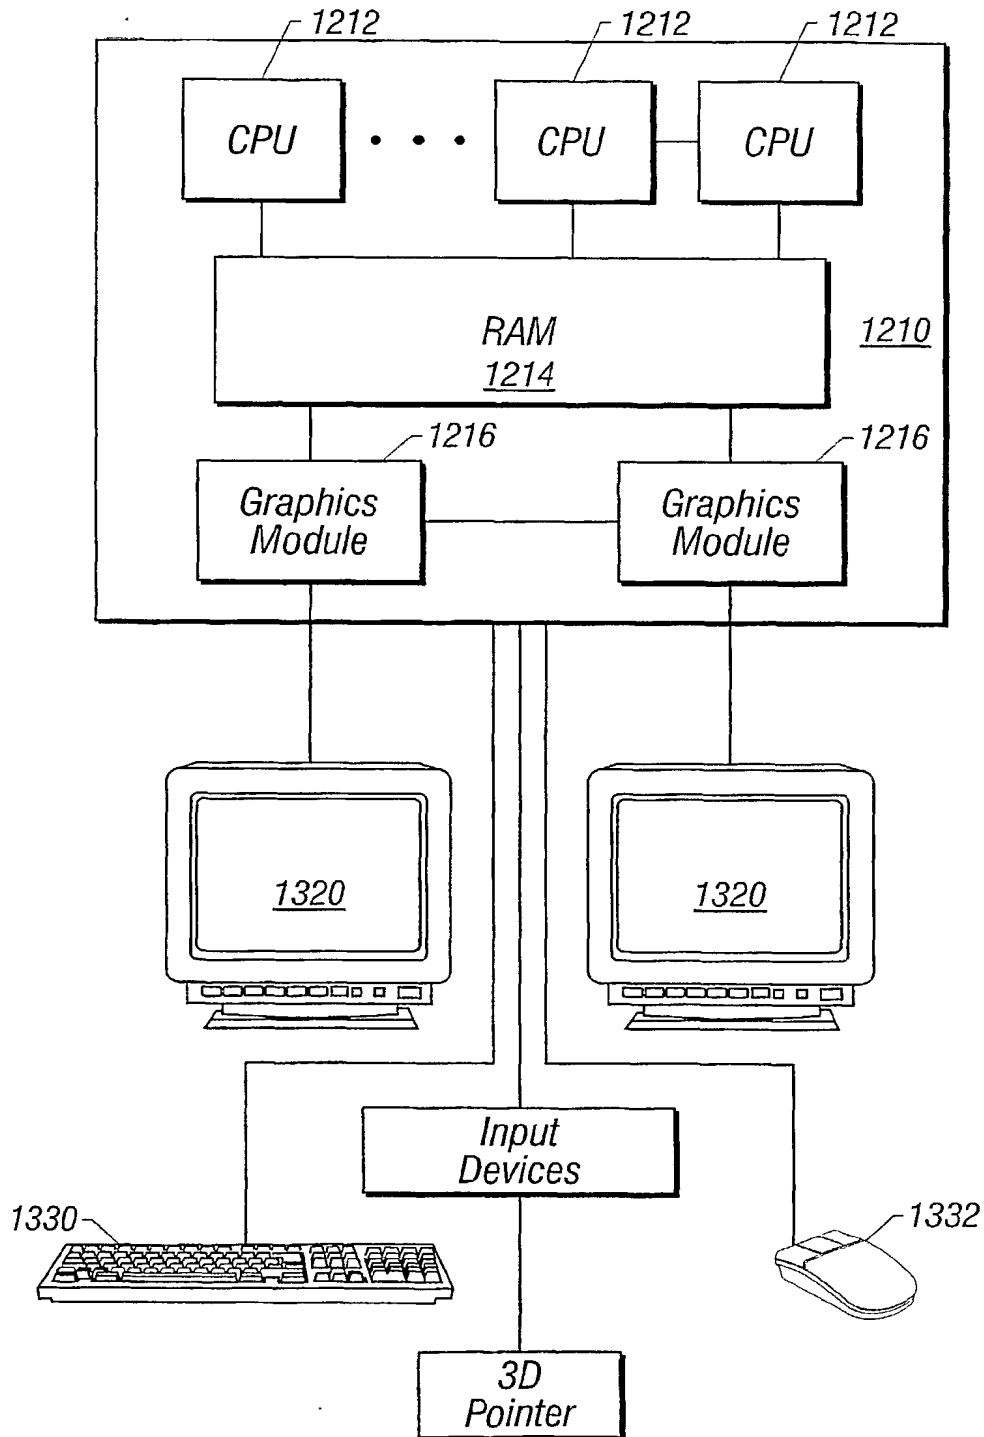


FIG. 13

12/17

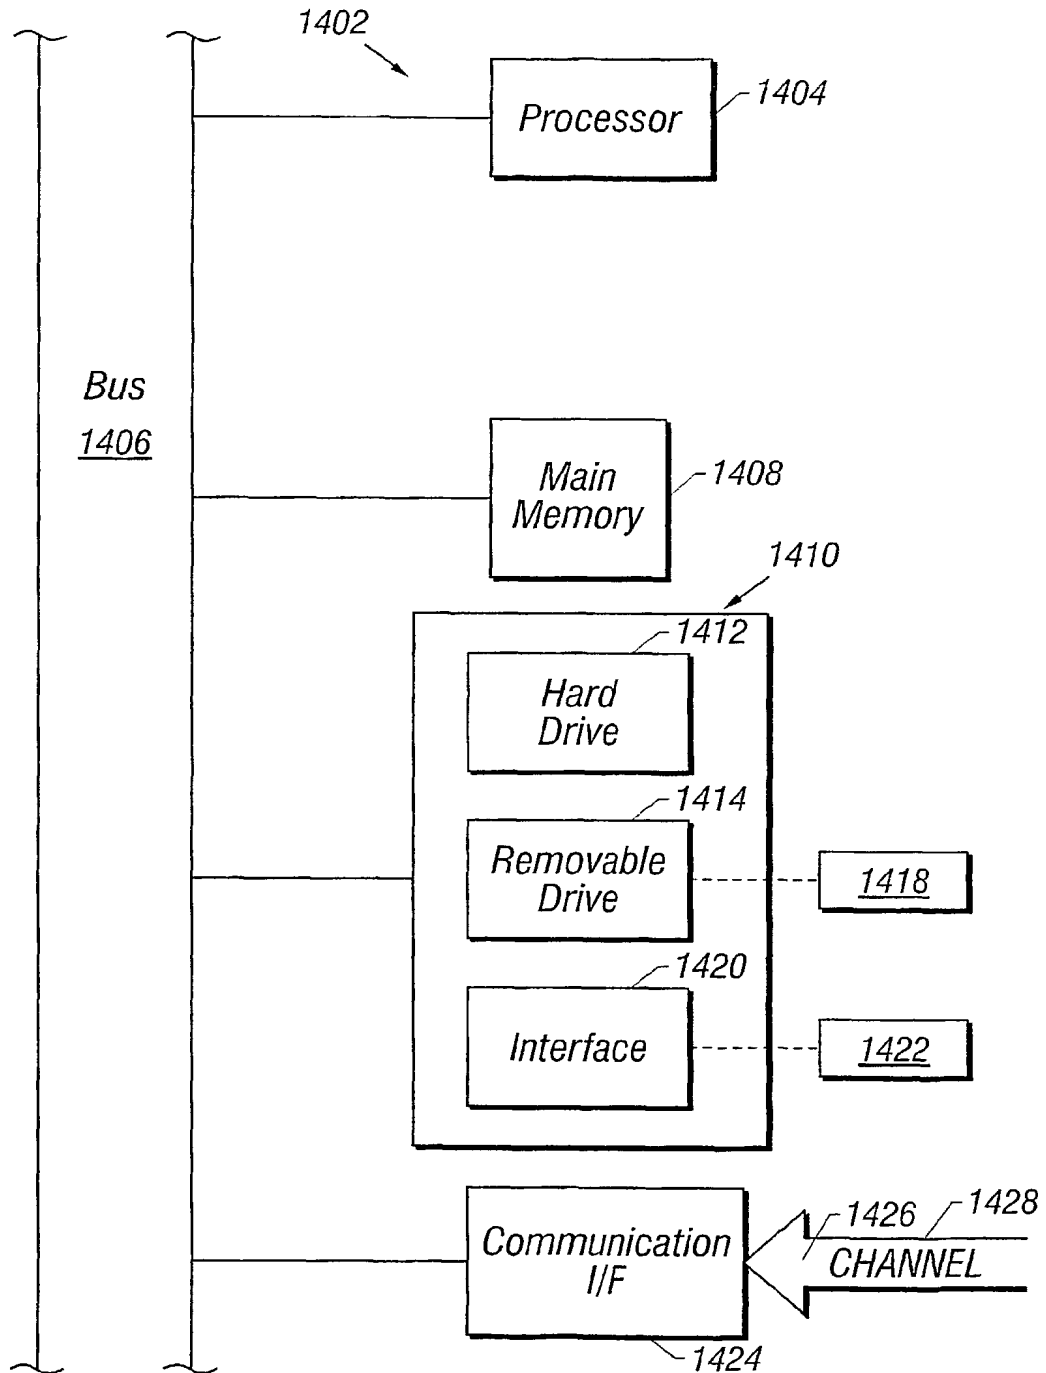


FIG. 14

13/17

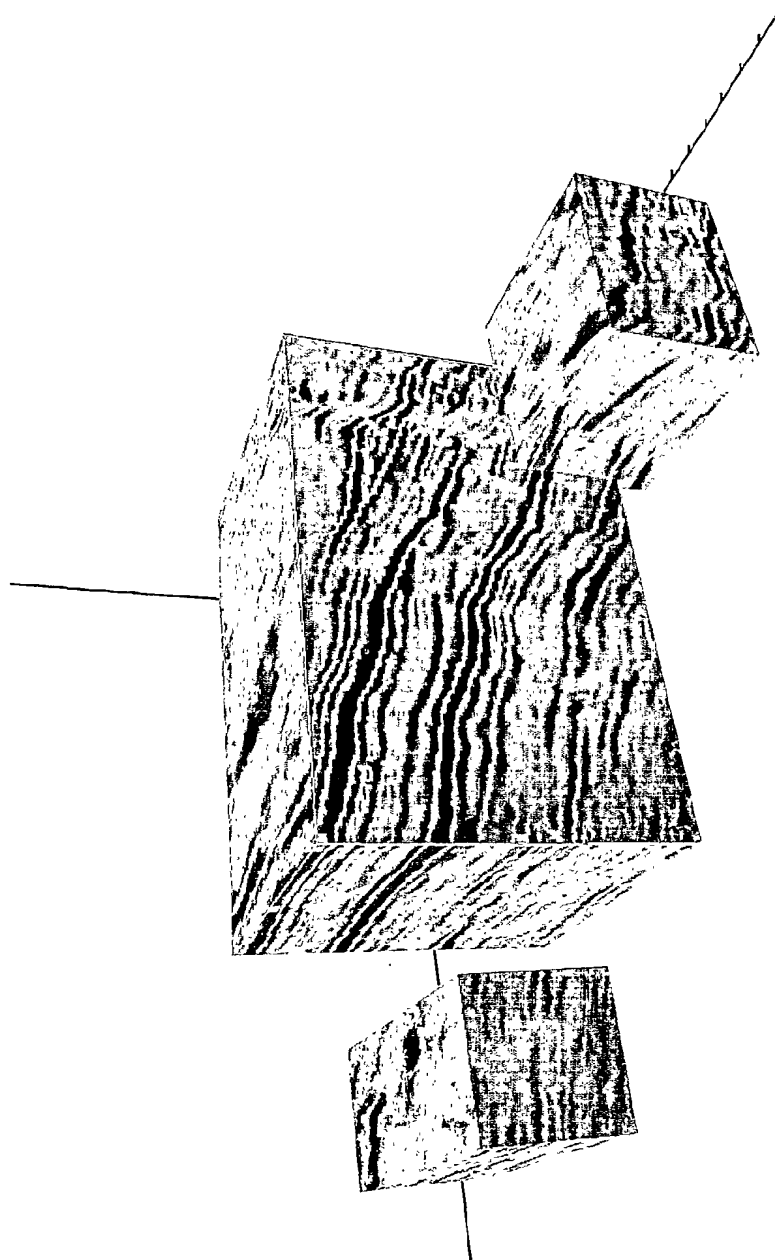


FIG. 15

14/17

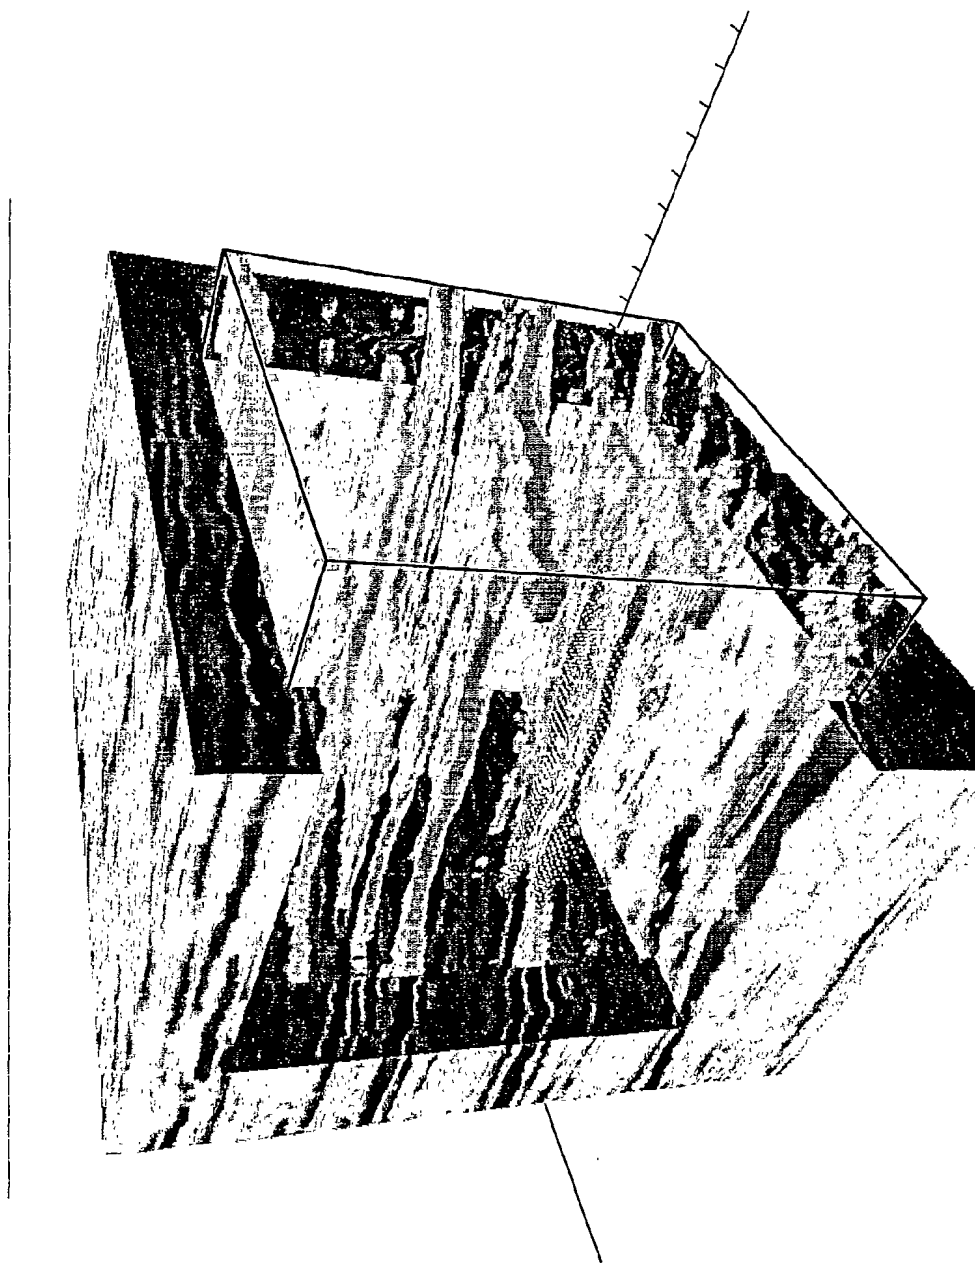


FIG. 16

15/17

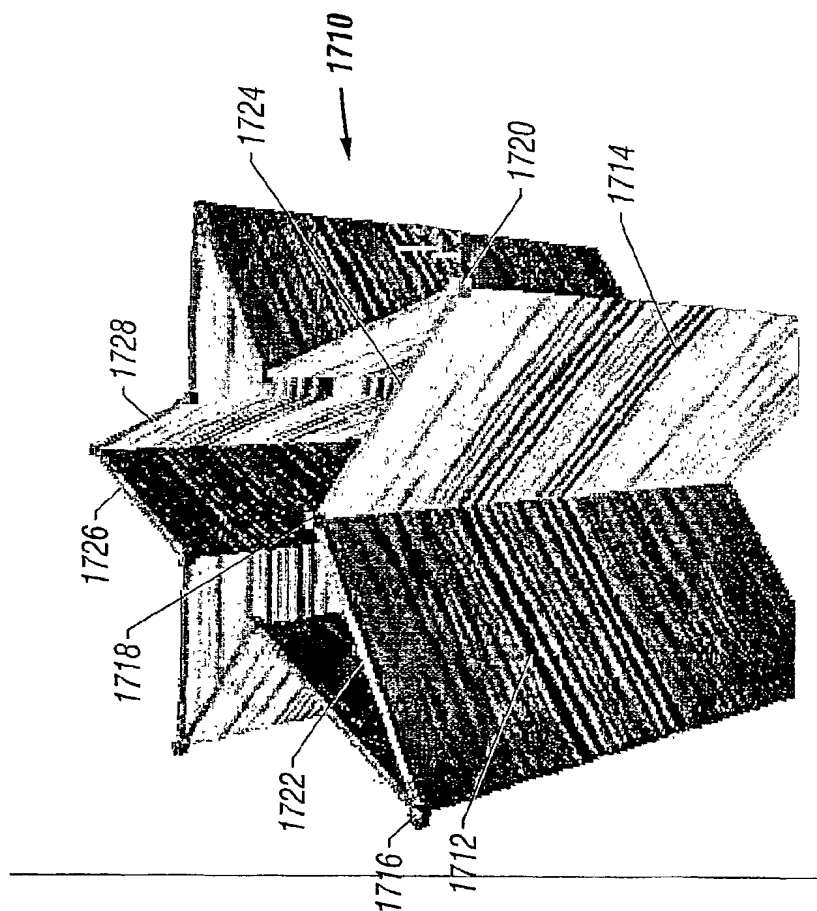


FIG. 17

16/17

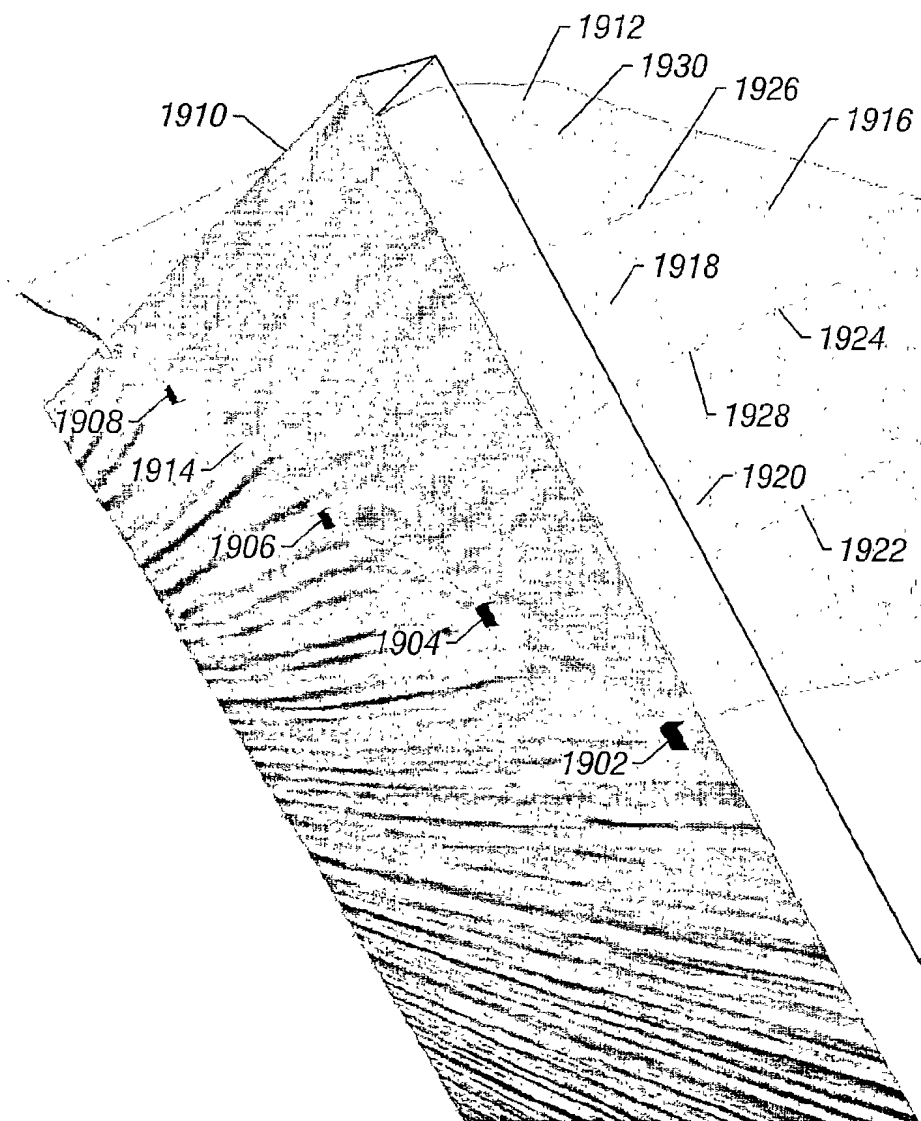


FIG. 19

09/936682

17/17

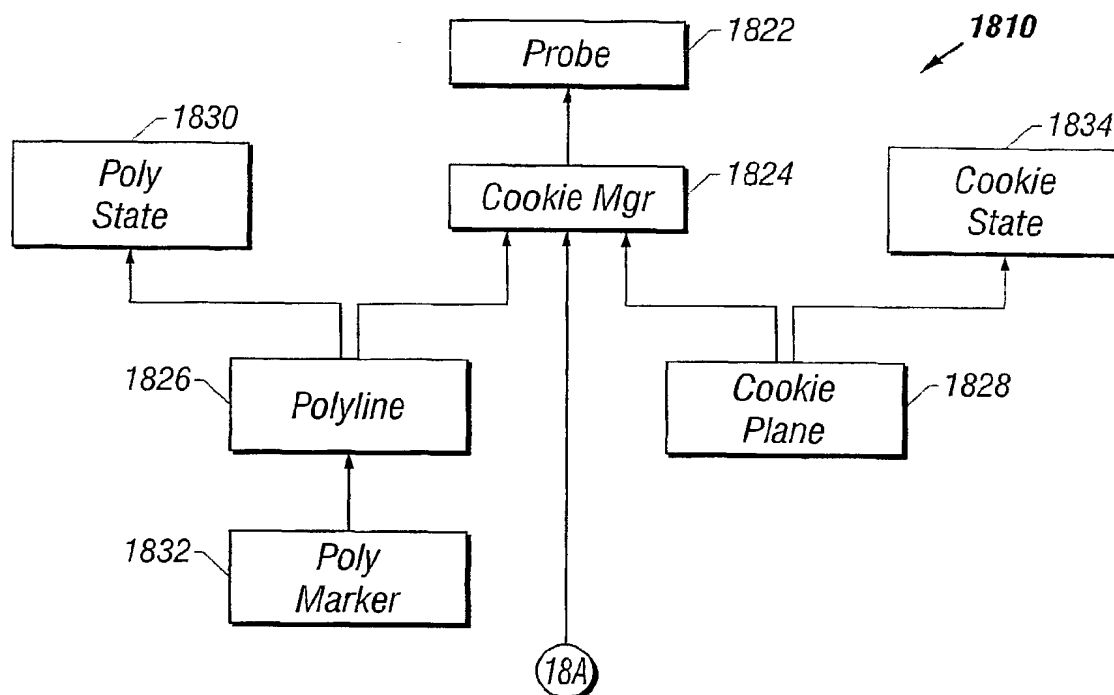


FIG. 18

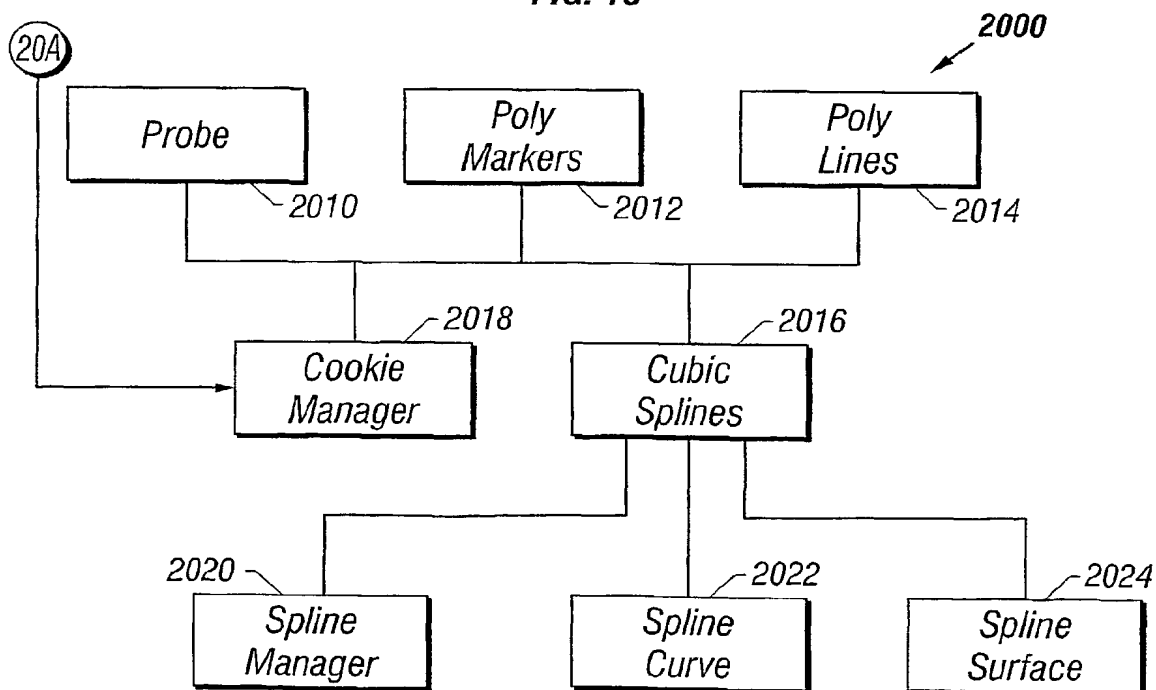


FIG. 20

COMBINED DECLARATION AND POWER OF ATTORNEY

*(ORIGINAL, DESIGN, NATIONAL STAGE OF PCT, SUPPLEMENTAL, DIVISIONAL,
CONTINUATION OR CIP)*

As a below named inventor, I hereby declare that:

TYPE OF DECLARATION

This declaration is of the following type: (check one applicable item below)

- ☒ original
☐ design
☐ supplemental

NOTE: If the declaration is for an International Application being filed as a divisional, continuation or continuation-in-part application do not check next item; check appropriate one of last three items

- ☒ national stage of PCT

NOTE: If one of the following 3 items apply then complete and also attach ADDED PAGES FOR DIVISIONAL, CONTINUATION OR CIP.

- ☐ divisional
☐ continuation
☐ continuation-in-part (CIP)

INVENTORSHIP IDENTIFICATION

WARNING: If the inventors are each not the inventors of all the claims an explanation of the facts, including the ownership of all the claims at the time the last claimed invention was made, should be submitted

My residence, post office address and citizenship are as stated below next to my name, I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

TITLE OF INVENTION

*"System and Method for Analyzing and Imaging Three-Dimensional
Volume Data Set"*

SPECIFICATION IDENTIFICATION

the specification of which: (complete (a), (b) or (c))

- (a) ☐ is attached hereto.
(b) ☐ was filed on _____ as Serial No. _____ or Express Mail No. _____, as
Serial No. not yet known and was amended on _____ (if applicable).

NOTE: Amendments filed after the original papers are deposited with the PTO which contain new matter are not accorded a filing date by being referred to in the declaration. Accordingly, the amendments involved are those filed with the application papers or, in the case of a supplemental declaration, are those amendments claiming matter not encompassed in the original statement of invention or claims. See 37 C.F.R. §1.67

- (c) (X) was described and claimed in PCT International Application No. **PCT/US 00/29835** filed on **30 October 2000** and as amended under PCT Article 19 on _____ (if any).

ACKNOWLEDGMENT OF REVIEW OF PAPERS AND DUTY OF CANDOR

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to the examination of this application in accordance with Title 37, Code of Federal Regulations. §1.56(a).

- () In compliance with this duty there is attached an information disclosure statement. 37 CFR §1.97.

PRIORITY CLAIM

I hereby claim foreign priority benefits under Title 35, United States Code, §119 of any foreign application(s) for patent or inventor's certificate or of any PCT international application(s) designating at least one country other than the United States of America listed below and have also identified below any foreign application(s) for patent or inventor's certificate or any PCT international application(s) designating at least one country other than the United States of America filed by me on the same subject matter having a filing date before that of the application(s) of which priority is claimed.

(complete (d) or (e))

- (d) () no such applications have been filed.
- (e) (X) such applications have been filed as follows.

NOTE: Where item (c) is entered above and the International Application which designated the U.S. claimed priority check item (e), enter the details below and make the priority claim

EARLIEST FOREIGN APPLICATION(S), IF ANY FILED WITHIN 12 MONTHS
(6 MONTHS FOR DESIGN) PRIOR TO THIS U.S. APPLICATION

Country	Application Number	Date of Filing (day, month, year)	Priority Claimed Under 35 U.S.C. §119
PCT	PCT/US 00/29835	30 October 2000	30 October 2000

ALL FOREIGN APPLICATION(S), IF ANY FILED MORE THAN 12 MONTHS
(6 MONTHS FOR DESIGN) PRIOR TO THIS U.S. APPLICATION

POWER OF ATTORNEY

As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith. (*List name and registration number*)

18
William B. Kircher, Reg. No. 22,481
James H. Marsh, Jr., Reg. No. 24,533
J. David Wharton, Reg. No. 25,717
Joseph B. Bowman, Reg. No. 25,807
Richard R. Johnson, Reg. No. 27,452
Walter R. Brookhart, Reg. No. 29,518
James H. Riley, II, Reg. No. 31,131
Joan Optican Herman, Reg. No. 31,968
Michael B. Hurd, Reg. No. 32,241

Devon A. Rolf, Reg. No. 35,337
Michael J. Gross, Reg. No. 35,528
William P. Jensen, Reg. No. 36,833
Daniel W. Shinn, Reg. No. 40,810
B. Trent Webb, Reg. No. 40,865
Susan J. Wharton, Reg. No. 41,524
Scott B. Strohm, Reg. No. 42,172
Clinton G. Newton, Reg. No. 42,930
Michael A. Riley, Reg. No. 45,043

- () Attached as part of this declaration and power of attorney is the authorization of the above-named attorney(s) to accept and follow instructions from my representative(s).

SEND CORRESPONDENCE TO

William P. Jensen
SHOOK, HARDY & BACON, L.L.P.
600 Travis, Suite 1600
Houston, TX 77002

DIRECT TELEPHONE CALLS TO:

(*Name and telephone number*)

William P. Jensen
Tel: (713) 546-5671
Fax: (713) 277-9508

DECLARATION

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

SIGNATURE(S)

Full Name of Sole or First Inventor: ¹⁻⁰⁰

Mark Acosta

Inventor's Signature: Mark Acosta

Date: 10/27/00

Country of Citizenship: U.S.A.

Residence:

2777 Woodland Park Drive, # 154
Houston, Texas 77082 TX

Post Office Address:

2000 West Sam Houston Parkway South, Suite 750
Houston, Texas 77042

09936682 . 091701

1085 732 1

079739562

582159 10

Full Name of Second Joint Inventor: 20 Yin Cheung

Inventor's Signature: Yin Cheung

Date: 10/27/2000 Country of Citizenship: U.S.A.

Residence: 5906 Bayberry Way
Sugar Land, Texas 77479 TX

Post Office Address: 2000 West Sam Houston Parkway South, Suite 750
Houston, Texas 77042

Full Name of Third Joint Inventor: 30 Jack Lees

Inventor's Signature: Jack Lees

Date: 10/27/2000 Country of Citizenship: U.S.A.

Residence: 6403 Edloe
Houston, Texas 77005 TX

Post Office Address: 2000 West Sam Houston Parkway South, Suite 750
Houston, Texas 77042

Full Name of Fourth Joint Inventor: 40 Charles Sembroski

Inventor's Signature: Charles Sembroski

Date: 10/27/2000 Country of Citizenship: U.S.A.

Residence: 5307 Summerside
Katy, Texas 77450 TX

Post Office Address: 2000 West Sam Houston Parkway South, Suite 750
Houston, Texas 77042

Full Name of Fifth Joint Inventor: 50 Michael Zeitlin

Inventor's Signature: Michael Zeitlin

Date: _____ Country of Citizenship: U.S.A.

Residence: 12506 Old Oaks
Houston, Texas 77024 TX

Post Office Address: 2000 West Sam Houston Parkway South, Suite 750
Houston, Texas 77042

09325632-091701 005

Full Name of Second Joint Inventor: Yin Cheung

Inventor's Signature: _____

Date: _____ Country of Citizenship: U.S.A.

Residence: 5906 Bayberry Way
Sugar Land, Texas 77479

Post Office Address: 2000 West Sam Houston Parkway South, Suite 750
Houston, Texas 77042

Full Name of Third Joint Inventor: Jack Lees

Inventor's Signature: _____

Date: _____ Country of Citizenship: U.S.A.

Residence: 6403 Edloe
Houston, Texas 77005

Post Office Address: 2000 West Sam Houston Parkway South, Suite 750
Houston, Texas 77042

Full Name of Fourth Joint Inventor: Charles Sembroski

Inventor's Signature: _____

Date: _____ Country of Citizenship: U.S.A.

Residence: 5307 Summerside
Katy, Texas 77450

Post Office Address: 2000 West Sam Houston Parkway South, Suite 750
Houston, Texas 77042

Full Name of Fifth Joint Inventor: Michael Zeitlin

Inventor's Signature: Michael Zeitlin

Date: 27 October 2000 Country of Citizenship: U.S.A.

Residence: 12506 Old Oaks
Houston, Texas 77024

Post Office Address: 2000 West Sam Houston Parkway South, Suite 750
Houston, Texas 77042

**CHECK PROPER BOX(ES) FOR ANY OF THE FOLLOWING ADDED PAGE(S) WHICH
FORM A PART OF THIS DECLARATION**

- (x) Signature for third and subsequent joint inventors. Number of pages added 1.
- () Signature by administrator(trix), executor(trix) or legal representative for deceased or incapacitated inventor. Number of pages added _____.
- () Signature for inventor who refuses to sign or cannot be reached by person authorized under 37 CFR §1.47. Number of pages added _____.

* * *

- () Added pages to combined declaration and power of attorney for divisional, continuation, or continuation-in-part (CIP) application.

() Number of pages added _____

* * *


- () Authorization of attorney(s) to accept and follow instructions from representative.

* * *

If no further pages form a part of this Declaration then end this Declaration with this page and check the following item.

- (x) This declaration ends with this page

United States Patent & Trademark Office
Office of Initial Patent Examination -- Scanning Division

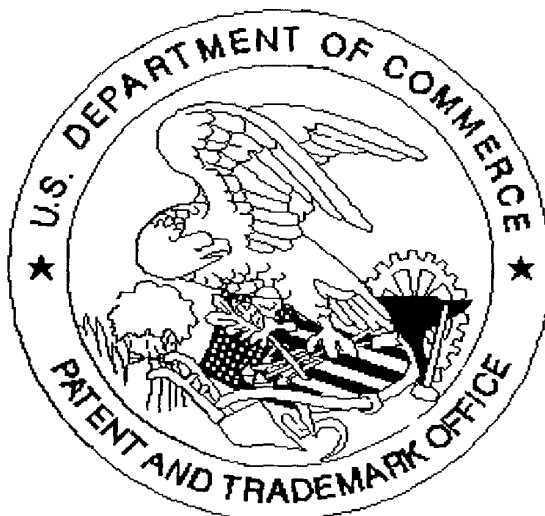

Application deficiencies found during scanning:

☐ Page(s) _____ of _____ were not present
for scanning. (Document title)

☐ Page(s) _____ of _____ were not present
for scanning. (Document title)

☒ **Scanned copy is best available.**

Some drawing figures are too dark.